# AURORA1000A4K-V2

## QUICK FACTS

| | |
|---|---|
| Input power | **12W** |
| Power Factor | **≥ 0.9** |
| IP Rating | **44** |
| Dimming | **Leading Edge** |
| Lumen output | **1210lm** |
| CCT | **4000K** |
| CRI | **80** |
| Beam Angle | **100°** |
| Fascia Colour | **White** |
| Installation | **Recessed** |
| Warranty | **5 years** |

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Supply Voltage | **240-265V** |
| Supply Frequency | **50-60Hz** |
| Cable | **1.2M Flex&Plug** |
| Body | **Aluminium** |
| Diffuser | **PC** |
| Driver | **Remote** |
| Weight | **G.W : 0.35kgs** |
| | **N.W : 0.28kgs** |
| Ambient Temp | **-30°C - 40°C** |
| Avg. lifetime | **≥50,000 hrs@ ta 25°C** |

**Option:**
**DALI Dimming, 1-10V Dimming**

PHOTO

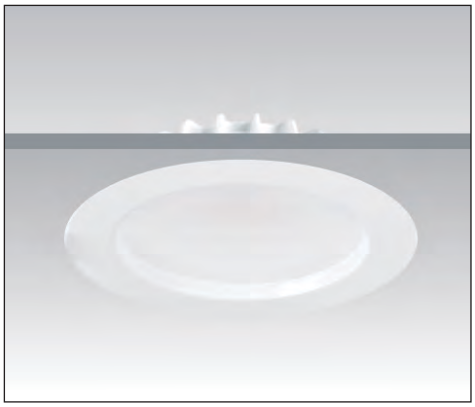

PHOTOMETRIC DIAGRAM

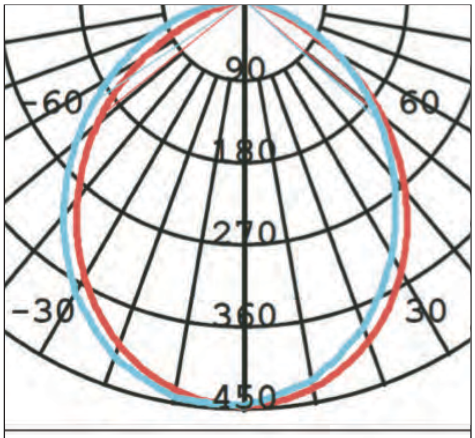


**UNIT: cd**

**C0/180 102.8deg**

**C90/270 105.6deg**

DIMENSIONS

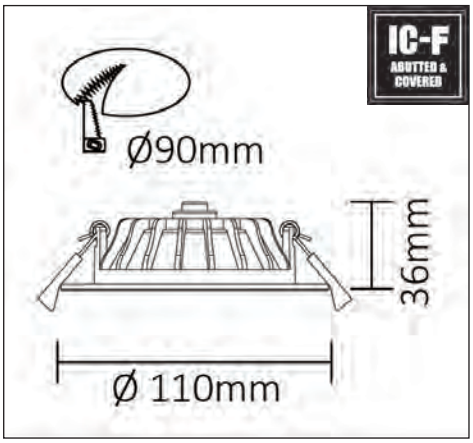


**Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.**