

## BENZINA G2

Thanks for choosing our BENZINA G2 products.

We strongly recommend that you read this manual carefully before installation.

### WARNING

- The luminaire must be installed by a licensed/qualified electrician in accordance with local wiring and relevant Australia standard.
- Ensure to disconnect mains supply before conducting any installation and maintenance the luminaire.
- Ensure input voltage conforms to the voltage range of product.
- Ensure all the wiring is correct and secured before connecting mains supply to the luminaire.
- Warranty is void if product is not installed according to the instructions.


Note: Product technical information and specification may change over time without prior notice. For latest information, please contact our customer service or visit our website [www.haneco.com.au](http://www.haneco.com.au)

### Product Specifications


PRODUCT CODE	POWER SWITCHABLE	CCT	INPUT RATINGS	IP/IK RATING	OPERATING TEMPERATURE
BENZINA150W-G2	75/100/120/150W	5000K	220-240V a.c. 50/60Hz	IP65/IK08	-30 to 45°C
BENZINA200W-G2	100/150/170/200W				

### Installation Instructions

- 1** Switch-off main power.

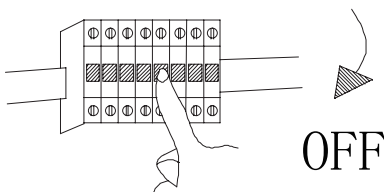


- 2** Drill holes on desired mounting surface as illustrated below.

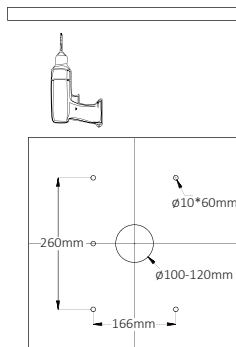


- 3** Remove IP65 cover to access the power dip switch. Adjust to the desired power setting.

**Note :** Fitting are preset with the highest wattage. To adjust lower wattage, turn dip switch to **ADJ.**

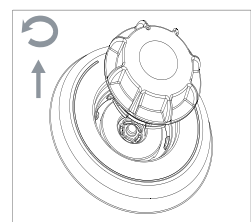


- 4** Connect the light fitting to the power supply with the supplied plug. Connect 0-10V dimming if required.


Secure the fitting onto the ceiling.

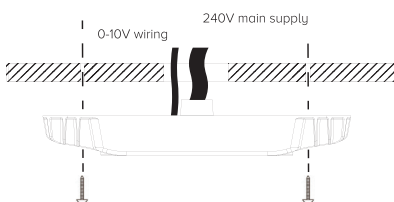


- 5** Finish the installation and switch-on main power.

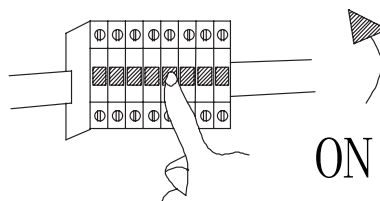


## Motion Sensor Installation



**STEP 1.** Switch Off the power supply. Remove the IP65 cover by rotating it counterclockwise and pull outward.




**STEP 2.** Insert the microwave sensor (HIGHBAY-MS : 2002281). Push downward and turn clockwise (360°) to engage the sensor. Motion sensor settings are set using a remote controller (HIGHBAY-REMOTE : 2002282).




**STEP 3.** It is correct installation when the microwave sensor is aligned with the marker as shown in the image. Turn ON the unit power and set the microwave sensor suit.

## Surface mount box installation guide


- 1** Use the SBOX as a template and mark and drill holes on the desired ceiling.

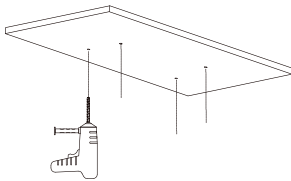


- 2** secure the SBox on the desired ceiling.

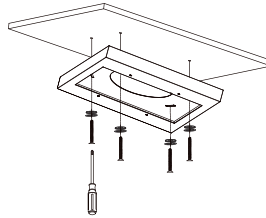



- 3** Connect the wiring. Ensure the main power is switch OFF before connecting the light fitting.

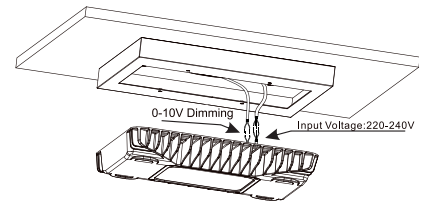

- 4** Secure Benzina G2 onto SBox with the supplied screws.

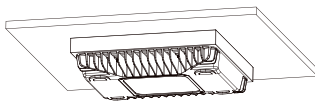

## Product Dimension

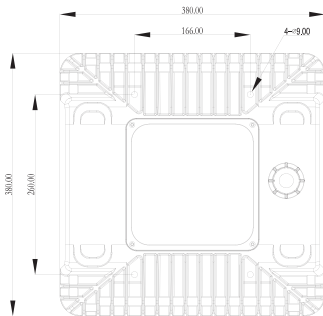

## Accessories (Not included)

PRODUCT CODE	Part number	Description
BEZINA G2 SBOX	2002286	Surface Mount Box
HIGHBAY-MS	2002281	Microwave sensor IP65, 12M
HIGHBAY-REMOTE	2002282	Remote control