Shoplights & High Output Downlights

AURORA CIRCLE

AURORA150A02

SAP CODE: 2000020

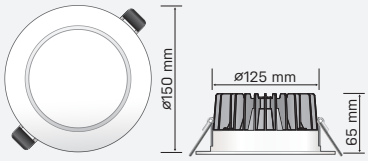

18W, 5000K, 150mm, recessed diffuser, LED downlight

A fixed white trimmed LED downlight with a recessed opal diffuser.

Photometric Diagram



Unit: cd
– C0/180 90.0deg
– C90/270 90.0deg

KEY INFORMATION

Lumen Output	1300lm
Input Power	18W
Hole Cutout Size	Ø125mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	72lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	90°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	46VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.8kg
Dimensions	Ø150x65mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.

Specification subject to change without prior notice. Last updated **15/08/2018**