HANECO
IDEAS THAT SHINE

METEOR

M15W90R4K45DC-B
SAP CODE: 2000331

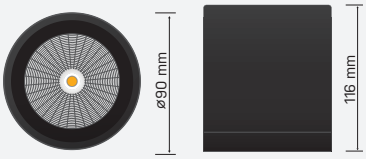

15W, black, 90mm, 4000K, surface mount, recessed diffuser, LED downlight

A surface mounted tubular downlight with a recessed clear lens and multifaceted specular reflector.

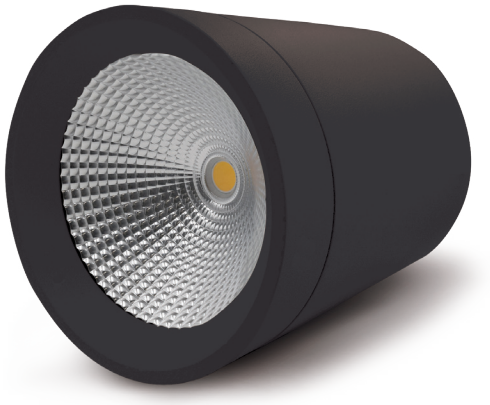

Photometric Diagram



Unit: cd
– C0/180 50.0deg
– C90/270 50.0deg

KEY INFORMATION

Lumen Output	1190lm
Input Power	15W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	*Phase-Cut Dimming
Trim Colour	BLACK
Warranty	5yr
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	80lm/W
LED	COB
CCT	4000K
CRI	>80
Beam Angle	45°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	37VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Multifaceted Reflector
Adjustable Angle	N/A
Fixings/Hardware	Mounting Plate
Connection Type	N/A
Total Weight	0.4kg
Dimensions	Ø90x116mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.

Specification subject to change without prior notice. Last updated 15/08/2018