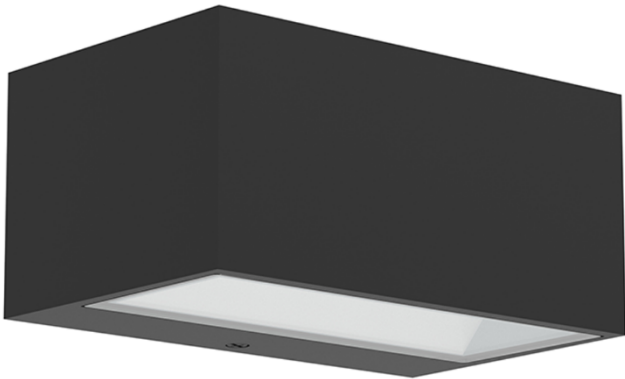## PRODUCT DATASHEET

GEMINI

5189113012
SAP CODE: 4001304

The GEMINI range features minimalistic, die-cast aluminum lights with powerful, symmetrical bi-directional beams. The compact versions (700-850 lumens) are ideal for focused installations, while the medium version (1200+ lumens) suits larger walls and entrances. Finished in sleek matte black or white, GEMINI combines elegance and functionality for versatile, modern lighting solutions
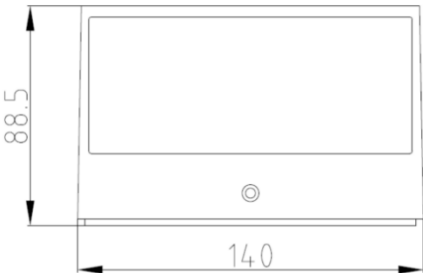
PHOTOMETRIC DIAGRAM

Unit: cd
— C0/180,360.0
— C30/210,356.2

KEY INFORMATION

Power	10W
Lumen Output	700 lms
Mounting Type	Wall Mount
Dimming Type	Non-Dimmable
Product Colour	Matt Black
IP Rating	IP54
IK Rating	IK07
Operating Ambient Temp.	-20 to 50 °C
Connection Type	Terminals
Driver	Integrated
Warranty	5 yrs

PHOTOMETRIC

Efficacy	70 lms/W
CCT	3000K
CRI	> 80
SDCM	< 5
Beam Angle	
Flicker-Free	Yes
Projected Lifespan	>50,000hrs @ Ta 25°C (L70)

Dimensions   89 x 140 x 65 mm

ELECTRICAL

Input Voltage	220-240 Vac
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	

OTHERS

Body Material	Aluminum
Diffuser Material	Poly carbonate
Cable Entry	Rear
Weight	0.50 kg