

PRODUCT DATASHEET


GEMINI

5189125012  
SAP CODE: 4001302

The GEMINI range features minimalistic, die-cast aluminum lights with powerful, symmetrical bi-directional beams. The compact versions (700-850 lumens) are ideal for focused installations, while the medium version (1200+ lumens) suits larger walls and entrances. Finished



PHOTOMETRIC  
DIAGRAM

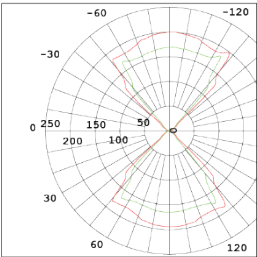


Unit: cd  
— C0/180,360.0  
— C30/210,360.0

KEY INFORMATION

Power	9W
Lumen Output	850 lms
Mounting Type	Wall Mount
Dimming Type	Non-Dimmable
Product Colour	Matt Black
IP Rating	IP54
IK Rating	IK07
Operating Ambient Temp.	-20 to 50 °C
Connection Type	Terminals
Driver	Integrated
Warranty	5 yrs

PHOTOMETRIC

Efficacy	95 lms/W
CCT	3000K
CRI	> 80
SDCM	< 5
Beam Angle	100°
Flicker-Free	Yes
Projected Lifespan	>50,000hrs @ Ta 25°C (L70)

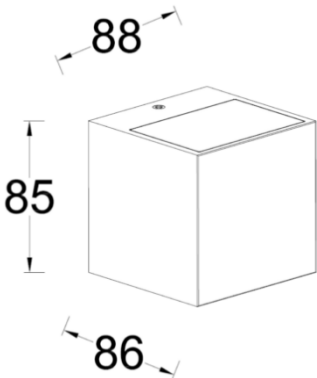

Dimensions 86 x 88 x 85 mm

ELECTRICAL

Input Voltage	220-240 Vac
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	1 kV

OTHERS

Body Material	Aluminum
Diffuser Material	Glass
Cable Entry	Rear
Weight	0.42 kg