

**PRODUCT DATASHEET**

**GEMINI XF**


7104002012

SAP CODE: 4001301

The bollard GEMINI XF is perfect to install along garden paths as there is no sky pollution thanks to the one direction powerful light beam. XF stands for "EXTRA FLAT"



**PHOTOMETRIC DIAGRAM**




Unit: cd

— C0/180,54.1

— C30/210,58.1

Photometric diagram shown is for 3000 K output.

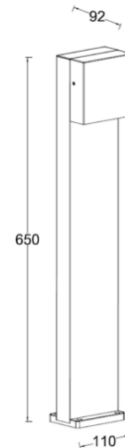

**Dimensions** 92 x 110 x 650 mm

**KEY INFORMATION**

<b>Power</b>	9W
<b>Lumen Output</b>	865 lms
<b>Mounting Type</b>	Surface Mount
<b>Dimming Type</b>	Non-Dimmable
<b>Product Colour</b>	Matt Black
<b>IP Rating</b>	IP54
<b>IK Rating</b>	IK07
<b>Operating Ambient Temp.</b>	-20 to 50 °C
<b>Connection Type</b>	Terminals
<b>Driver</b>	Integrated
<b>Warranty</b>	5 yrs

**PHOTOMETRIC**

<b>Efficacy</b>	94 lms/W
<b>CCT</b>	3000K
<b>CRI</b>	> 80
<b>SDCM</b>	< 3
<b>Beam Angle</b>	C0/180: 55 °
<b>Flicker-Free</b>	Yes
<b>Projected Lifespan</b>	>50,000hrs @ Ta 25°C (L70)

**ELECTRICAL**

<b>Input Voltage</b>	220-240 Vac
<b>Power Factor</b>	> 0.9
<b>Electrical Classification</b>	Class I
<b>Surge Protection</b>	L-N1000V

**OTHERS**

<b>Body Material</b>	Aluminum
<b>Diffuser Material</b>	Glass (Clear)
<b>Cable Entry</b>	Rear
<b>Weight</b>	1.56 kg