


DAWN 16W

DN16WOVL-TRI-MS

SAP CODE: 2001909

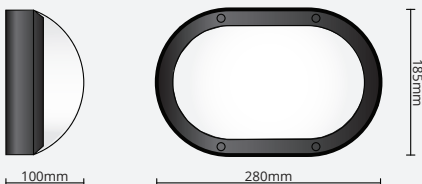


16W, IP66, Selectable Colour Temperature LED Bunker with sensor

A robust oval Bunker light, constructed with aluminium body and opal diffuser for both residential and commercial applications.



Photometric Diagram



KEY INFORMATION

Lumen Output	1320 / 1500 / 1400lm
Input Power	16W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-dimmable (*phase-cut dimmable driver available)
Fitting Colour	BLACK
Warranty	3yr
IP Rating	IP66
IK Rating	IK10
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	83 / 94 / 87lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40V DC
Power Factor	>0.9
LED Input Current (nominal)	400mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION


Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	1kg
Dimensions	280 x 185 x 100mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.

Micro-wave sensor

Combine daylight & high frequency motion detection in one unit to achieve on/off control

Detection range, hold time, standby time and daylight threshold can be preset.



Wall Mount


ELECTRICAL

Load Wattage	16W (20W and 30W for 20W and 30W models)
Standby Power	<0.5W
Microwave Frequency	5.8Ghz
Detection Area	<0.5mW
Detection Sensitivity	4 - 7m
Hold Time	5s/30s/60s/3min/5min/10min/20min/30min
Standby Dimming Level	Non-Dim
Daylight Threshold	2Lux/10Lux/25Lux/50Lux/Disable

Note: Permanent Standby overrides/disables Daylight sensor to save energy during daylight.

DIP SWITCH SETTINGS

Detection Area		Hold Time			Daylight Sensor		
1	2	3	4	5	6	7	8
on	on	on	on	on	on	on	on
100%		5s			2Lux		
on	on	on	on	on	on	on	on
75%		30s			10Lux		
on	on	on	on	on	on	on	on
50%		1min			25Lux		
on	on	on	on	on	on	on	on
25%		3min			50Lux		
		5min			Disable		
		10min					
		20min					
		30min					



- NOTE:**
- 'Os" means on/off control.
 - "+" means bi-level dimming control, fixture never switches off.
 - Factory default setting: 100%, 1min, 50Lux, 5min, 100%