

# HANECO LIGHTING EMERGENCY LED EXIT SURFACE MOUNTED LIGHT FITTING INSTALLATION GUIDE

## ESODO 24M SURFACE MOUNT

Thanks for choosing our ESD24M-SMT EMERGENCY EXIT products.


We strongly recommend that you read this manual carefully before installation.

### Product Specifications

| Product Code | Max power consumption when charging | IP Rating | Input Rating             | Operating Temperature | Electrical Classification | EM Time |
|--------------|-------------------------------------|-----------|--------------------------|-----------------------|---------------------------|---------|
| ESD24M-SM    | 4W                                  | IP20      | 220 - 240V AC<br>50/60Hz | 0-45°                 | Class II                  | >2hr    |

### Ceiling Mount

1. Switch-off main power

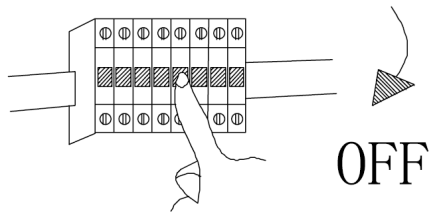

2. Choose the direction of installation



Straight





Right




Left


3. Change the pictogram if necessary

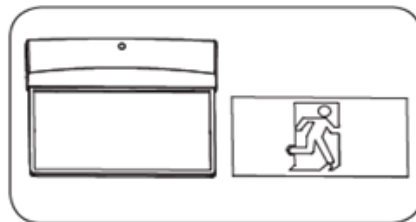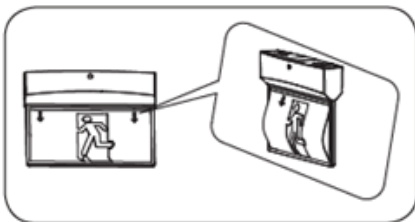


4. Knock out the cable entry in the middle.

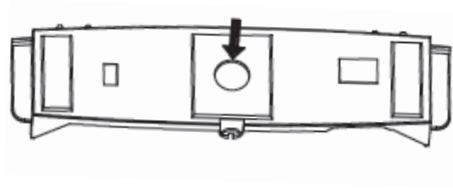


5. Bring the main cable in from the knock-out in the middle top. Then mount the base on desired surface

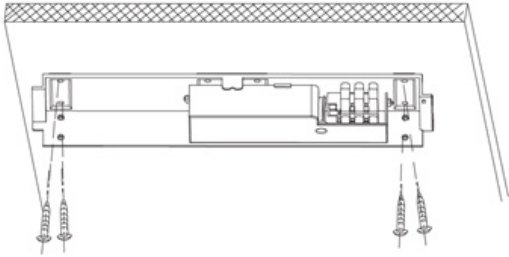


6. Wire the fitting as illustrated in the diagram below



7. Place the fitting back

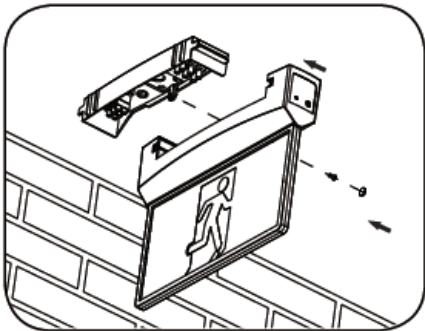

8. Test the installation in accordance with wiring rules and regulation switch on power

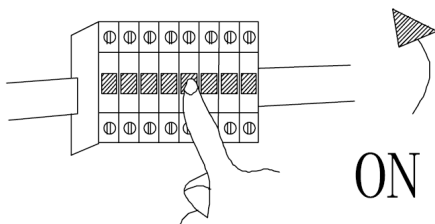

**WARNING**

The luminaire must be installed by a professional electrician.  
Always switch the power off when wiring the luminaire.  
Ensure input voltage conforms to the voltage range of product.  
Ensure wires are securely connected.  
Before switching on, ensure that all the wiring is correct.  
Warranty is void if product is not installed according to the instructions.