

HANECO LED STRIP INSTALLATION GUIDE


FLEXION^{SMOOTHLINE}

Warning:


1. The LED strip and accessories can't be squeezed and folded.
2. PCB conductive parts can't be damaged when installing.
3. Pay attention to positive and negative polarities before installation, otherwise the LED strip may be damaged.
4. When connecting multiple LED strips, it is recommended to electrically connect in parallel. Please ensure the connected driver is rated higher than the combine total power of the LED strips.
5. Cut the LED strip along the logo mark.
6. When install on metal or conductive surface, the contact must adopt insulation protection.
7. Please prevent static electricity when installing. The product need anti-corrosion environment, such as, avoiding damp, water drop or other adverse elements.
8. Do not lay the adapter and the control directly on the ground or where standing water may accumulate.



Always disconnect the power supply before installation. Clean the surface to assure the self-adhesive backing will adhere properly. The mounting surface needs to be smooth, dry, and free from oils and waxes.



Do not bend the LED strip sideways.



Do not twist the LED strip.

Connecting & Installation Diagram



SOB strip light



Cleaning cloth




Power supply



Scissor


Connecting & Installation Diagram

Step 1:




First clean the place where the LED strip will be installed

Step 2:




Gently peel off the tape and the adhesive tape may tear by over stretching.

Step 3:




Stick the LED strip and press hard, and then press the whole LED strip repeatedly.

Step 4:



Watch out by not stepping on the reel if you unroll the whole strips out first.

Step 5:




Connect LED strip to the power supply.


The maximum connect length of single connection controller is 10m (32.8ft).

Cutting

Always disconnect the power supply before shortening. LED Strips can be cut along the mark of "scissor".



Dimensions (mm)

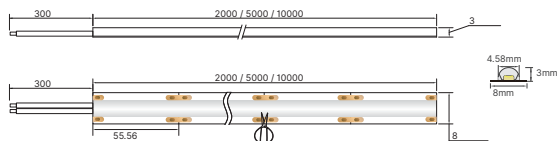

Product Code:

FXDL6W-3K2M
FXDL6W-4K2M
FXDL6W-6K2M
FXDL14W-3K2M
FXDL14W-4K2M
FXDL14W-6K2M
FXDL9W-3K2M
FXDL9W-4K2M
FXDL9W-6K2M

FXDL6W-3K5M
FXDL6W-4K5M
FXDL6W-6K5M
FXDL9W-3K5M
FXDL9W-4K5M
FXDL9W-6K5M
FXDL14W-3K5M
FXDL14W-4K5M
FXDL14W-6K5M
FXDL6W-3K10M
FXDL6W-4K10M
FXDL6W-6K10M
FXDL9W-3K10M
FXDL9W-4K10M
FXDL9W-6K10M