

# APEX

*Engineered Strength. Minimal Glare.*



**IP66**  
Ingress  
Protection  
Rating



**IK10**  
Impact  
Rating



**Flicker**  
Free



## SURFACE MOUNT LED BOLLARD

### APPLICATIONS:

**Residential:** Carports, garden pathways, outdoor areas

**Hospitality & Leisure:** Hotel common areas, outdoor areas

**Public & Commercial:** Public facilities, side of building applications, road lighting, streetscapes



**APEX** is built for demanding outdoor environments, combining IK10 impact resistance and IP66 protection with low-glare performance. Its aluminium housing and 50°C ambient rating ensure long-term durability in pathways, commercial landscapes, and public spaces.

IP RATING	CRI	BEAM ANGLE	FLICKER-FREE	OPERATING TEMP.
IP66	> 70	Type V	YES	-30 to 50 °C

PRODUCT COLOUR	PROJECTED LIFESPAN	WARANTY
Black RAL9017	>78,000hrs @ Ta 25°C (L80)	5 Years




Engineered Strength.  
Minimal Glare.

**KEY INFORMATION**

Product Code	Power	Lumen	CCT	IK Rating	Dimming	Driver
APEX14W730T5-1M	14W	1,540 lm	3000 K	IK10	Non-Dimmable	In Built
APEX24W730T5-1M	24W	2,566 lm				



**PHOTOMETRIC DIAGRAM**

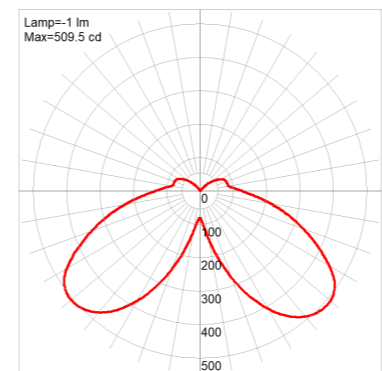

**ELECTRICAL**

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.90
Electrical Classification	Class I
Surge Protection	6kV

**DIMENSIONS & WEIGHTS**

Product Code	A x B (mm)	Weight (kg)
APEX14W730T5-1M	Ø 160 x 900	6.16
APEX24W730T5-1M	Ø 160 x 900	6.16

