



# ARCHISPOT

## Outdoor Wall Lights

Simple elegance.

**ARCHISPOT** is a decorative wall pillar luminaire providing a contemporary solution for modern exteriors such as porticos and entrances. It features tritone colour selectable technology, allowing for customised lighting to suit any environment. The adjustable models can also be used for accent lighting.

### Features

- Choice of colour finishes
- Excellent feature lighting option
- Narrow design
- Balanced up/down lighting (Model Dependent)
- Extensive model range
- Painted aluminium housing
- Modernised design
- Fitting available with single or multiple lights
- Easily adjustable
- IP65 Rating

### Benefits

- Blend fitting into the existing environment seamlessly
- Ideal for accent lighting
- Built to be aesthetic with minimal space
- Ideal solution for outdoor architecture lighting
- Covers a diverse range of applications
- Enhances the premium look and feel
- Provides high end appearance
- Provide limitless lighting flexibility
- Simple installation and adjustability
- Ideal for outdoor areas



## Product Overview


POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	PRODUCT CODE
6 W	392 / 421 / 354 lm	65 / 70 / 59 lm/W	3000 / 4000 / 6500 K	0.4 kg	2002418	AS-ADJ-TRI-S
					2002417	AS-ADJ-TRI-B
					2002416	AS-ADJ-TRI-W
6 W	392 / 421 / 354 lm	65 / 70 / 59 lm/W	3000 / 4000 / 6500 K	0.4 kg	2002415	AS-FIX-TRI-S
					2002414	AS-FIX-TRI-B
					2002413	AS-FIX-TRI-W
12 W	784 / 842 / 708 lm	65 / 70 / 59 lm/W		0.6 kg	2002412	AS-U/D-TRI-S
					2002411	AS-U/D-TRI-B
					2002410	AS-U/D-TRI-W

SPECIFICATIONS	
Body Material:	Aluminium
Diffuser Material:	Polycarbonate (Opal)
Mounting Type:	Surface Mount
Body Colour:	Silver Black White
IP Rating:	IP65
CRI:	>80
Beam Angle:	51° Adjustable 51° Fix 48° Up and Down
SDCM:	< 7
Warranty:	3 yrs (1yr lamp)
Dimming:	Non-Dimmable
Driver:	Integral
Connection Type:	PA12 Terminal Block
Input Wattage:	220-240Vac 50/60HZ
Electrical Classification:	CLASS I
Power Factor:	> 0.9
Projected Lifespan:	>36,000hrs@Ta25°C(L70)
Operating Ambient Temp.	-20 to 40°C
Surge Protection:	Overload / Short Circuit
Smart:	KASTA Compatible


APPLICATIONS
Accent / Display / Feature Lighting
Garage
Side of Building
Carport
Area Lighting

Outdoor Lighting


## DIMENSIONS

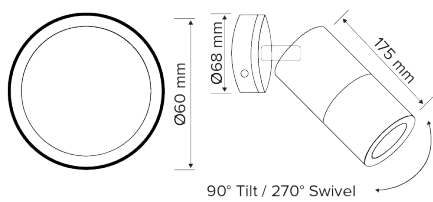

AS-ADJ-TRI-S  
AS-ADJ-TRI-B  
AS-ADJ-TRI-W

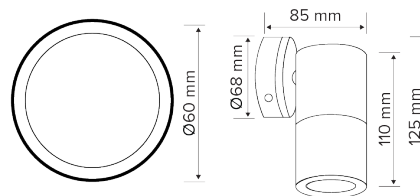

AS-FIX-TRI-S  
AS-FIX-TRI-B  
AS-FIX-TRI-W

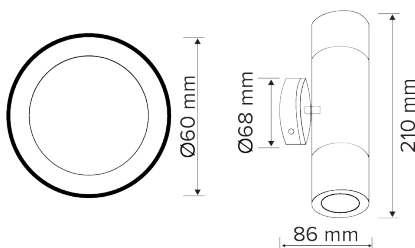

AS-U/D-TRI-S  
AS-U/D-TRI-B  
AS-U/D-TRI-W

