


## Installation Instructions

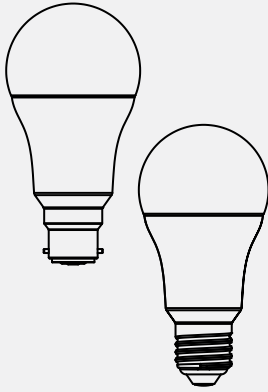

### KASTA Smart Bulbs

Product Code:  
**KB8RGBTWGE27**  
**KB8RGBTWGB22**

#### APP Installation

Visit [www.kasta.com.au](http://www.kasta.com.au) or your app store to download the free KASTA app.  
 iOS: requires iOS 9.0 or later.  
 Android: requires Android 4.4 or later.  
 Devices must support Bluetooth 4.0



#### Important Safety Information

- Do not install the LED Globe with wet hands or when standing on wet or damp surfaces.
- Indoor use only. Not suitable for damp or explosive environments. Use in dry locations only.
- Not suitable for use with standard in-wall dimmers. Dimmable via the KASTA app only.
- This device is not intended for use with emergency exit luminaires.
- **WARNING: RISK OF ELECTRIC SHOCK OR BURNS.** Switch OFF the light switch controlling the bulb and WAIT for the bulb to cool down before attempting to change it.
- Complies to Australian Standards AS/NZS 62560:2017, AS/NZS CISPR 15 and AS/NZS 4268:2017
- No user serviceable parts inside.

### FEATURES

- RGB and Tuneable White LED Downlight.
- White trim
- Wireless Bluetooth® Mesh communication.
- Control from the KASTA app or KASTA remote switch devices (8x maximum per bulb).
- Configured using the KASTA app (iOS and Android), with a white CCT dial, a RGB colour wheel and a pre-set colour palette.
- Supports Group, Scene, Timer and Scheduling automation functions.
- 3 year warranty.

### FUNCTION SETUP

(Controllable via KASTA remote switch devices or the RESET button on the LED Driver)

ON/OFF	1 CLICK
Turns lights on or off. When turned ON, lights will adjust to previous brightness setting.	
DIM UP/DOWN	ONE LONG PRESS
When lights are on, long press button to dim up or down. Release button to stop.	
FULL BRIGHTNESS	2 CLICKS
Sets lights to full brightness.	
DELAY TO OFF	3 CLICKS*
Light turns off automatically after a set time (configured in the app). Single click to cancel.	
SET WHITE CCT COLOUR TEMPERATURE	4 CLICKS*
Cycle through white CCT colour temperature. Click button 1 time to store setting.	
SET RGB COLOUR	5 CLICKS*
Cycle through the pre-set colours to your desired colour. Click button 1 time to store setting.	
FACTORY RESET	9 CLICKS

Restores all settings back to factory (using reset button only).

\*If successful, light will pulse the number of times that the switch was clicked, indicating function.

### TECHNICAL SPECIFICATIONS

**RGB & CCT:** RGB: 16M colours  
 White: 2700K - 6500K

**CRI:** ≥80 (for White)

**Supply:** 220-240V AC 50Hz

**Operating Temp:** -20°C to 40°C (IC-4 Max 25°C)

**Input Power:** Max 8W +/- 10% (White)

**IP Rating:** IP20 (light-emitting area)

**Dimensions:** 60x60x112mm

### CONNECTION DIAGRAM

