



ARIS

Highbays



DIM
0-10V
Dimming



IP65
Ingress
Protection
Rating



IK10
Impact
Rating



HACCP
Food
Safe



50,000hr
Expected
Lifetime



5yr
Warranty

Sleek and tough.

ARIS is a series of sleek and high performance linear LED highbays. Dedicated beam angles and flexible mounting options make it the perfect solution for wide or narrow aisle spaces.

Features

- Sleek diecast aluminium housing
- Choice of beam angles
- HACCP approved
- Surface mount or suspended mount

Benefits

- Improved aesthetics and thermals
- Optimised illumination for narrow or wide aisles
- Suitable for food manufacturing
- Enhanced application flexibility

Product Overview

| POWER | LUMENS | EFFICACY | CCT | BEAM ANGLE | WEIGHT | SAP CODE | PRODUCT CODE |
|-------|----------|----------|-------|--------------------|--------|----------|-----------------------|
| 150W | 18630 lm | 124 lm/W | 5000K | 30°x70° High Mount | 3.50kg | 2002031 | ARIS150W30x70 |
| | 18740 lm | 125 lm/W | 5000K | 40°x120° Low Mount | | 2002032 | ARIS150W40x120 |
| 200W | 24880 lm | 124 lm/W | 5000K | 30°x70° High Mount | 4.10kg | 2002033 | ARIS200W30x70 |
| | 24910 lm | 125 lm/W | 5000K | 40°x120° Low Mount | | 2002034 | ARIS200W40x120 |

SPECIFICATIONS

| | | | |
|-----------------------------|------------------------|---------------------------------------|--------------------------|
| Body Material: | Aluminium | Driver: | Integral |
| Diffuser Material: | PMMA (Acrylic) | Power Lead: | 1.2m Flex & Plug |
| Body colour: | Black | Input: | 220-240V, 50/60Hz |
| IP Rating: | IP65 | Electrical Classification: | Class 1 |
| IK Rating: | IK10 | Power Factor: | >0.9 |
| Food Grade Approval: | HACCP | Protection: | Overload / Short Circuit |
| Beam Angle: | (See product overview) | Lifespan: | >50,000hrs @Ta25°C (L70) |
| CRI: | >80 | Operating Ambient Temperature: | -20 to 50°C |
| SDCM: | <5 | Smart: | KASTA Compatible |
| | | Dimming: | 0-10V Dimmable |

APPLICATIONS

Warehouse
Factory
Petrol Stations
Railway Stations
Overpasses
Airport Buildings
Other Large Areas

ACCESSORIES

Daylight and Microwave Sensor
ARIS-SENSOR
(SAP 2002035)



Sensor Remote Controller
SKYLUX-REMOTE
(SAP 2001901)

- Required to configure sensor




Suspension Kit
ARIS-SUSKIT
(SAP 2002068)

- 1500mm cable x2
- Adjustable Length




DALI Converter
HBAY-DALI-CONV
(SAP 2002095)

- IP65 rated
- Converts product to be DALI dimmable



DIMENSIONS

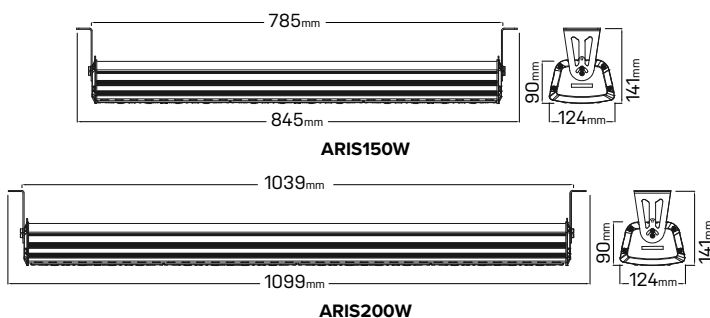

FIND OUT MORE:

