


ARTURA

ARTURA5W-BK
SAP CODE: 2002155

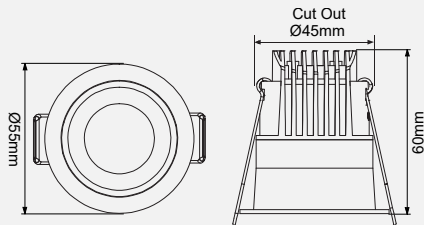

Remote Driver Dimensions: 109x40x22mm

2 in 1 Pinhole LED Downlight

Extra low glare deep recessed lens design supplied with both Pinhole and Reflector.

Black powder coated diecast aluminium body complete with narrow body phase-cut dimmable driver and 1.2m flex and plug.


Available in White finish
ARTURA5W-WH
SAP CODE: 2002156



Optional pin-hole iris supplied




Photometric Diagram



Unit: cd
- C0/180 20.0deg
- C90/270 19.4deg



Photometric Diagram

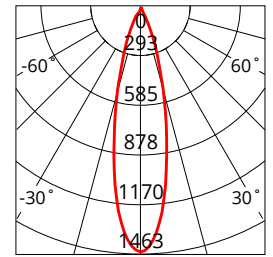

Unit: cd
- C0/180 24.6deg
- C90/270 24.5deg

KEY INFORMATION

Watts	5W
Lumen Output	300lm (150lm with pin-hole)
Hole Cutout Size	Ø45mm
Install	Recessed
Dimming Method	Phase-Cut Dimmable
Fitting Colour	Black - ARTURA5W-BK White - ARTURA5W-WH
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
UGR Rating	<10
Rebate Scheme Approval	-

PHOTOMETRIC

Efficacy	57lm/W (30lm/W with pin-hole)
LED	COB
CCT	2700K
CRI	>80
Beam Angle	24° (19° with pin-hole)

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	15-40V
Power Factor	>0.9
LED Input Current (nominal)	230 mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

SCDM	<5
Housing	Aluminium
Optics	PMMA
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	0.22kg (0.23kg with pin-hole)
Dimensions	Ø55 x 60mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2