



# ARTURA

## Residential Downlights



**DIM**  
Phase Cut  
Dimming



**IP44**  
Ingress  
Protection  
Rating



**UGR<19**  
Beam  
Angle



**IC-4**  
Covered &  
Abutted



**50,000hr**  
Expected  
Lifetime



**5yr**  
Warranty

### Create ambient spaces.

ARTURA features a deep recessed design for a narrow beam angle to create ambient spaces. An additional pin-hole optic funnels the beam even further and makes it ideal for adding atmosphere to any apartment and hospitality project.

### Features

- Deep recessed lens
- Modern and clean design
- Robust diecast aluminium construction
- Pin-hole accessory included
- IC-4 rating (ta 25°C)

### Benefits

- Extra low glare
- High end appearance
- Improved thermal characteristics
- Reduce beam angle even further
- Allows for covered or abutted installation

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	FASCIA	SAP CODE	PRODUCT CODE
5W	300 lm	57 lm/W	2700K	Ø45mm	0.23kg	White	2002156	<b>ARTURA5W-WH</b>
						Black	2002155	<b>ARTURA5W-BK</b>
-	(150 lm)	(30 lm/W)	-	-	-	-	-	(with pin-hole installed)

### SPECIFICATIONS

<b>Body Material:</b>	Aluminium	<b>Driver:</b>	Remote
<b>Diffuser Material:</b>	Polycarbonate (Clear)	<b>Power Lead:</b>	1.2m Flex & Plug
<b>Fascia colour:</b>	White: RAL9010 Black: RAL9004	<b>Input:</b>	220-240V, 50/60Hz
<b>IP Rating:</b>	Front: IP44 Body: IP40	<b>Electrical Classification:</b>	Class 2
<b>IC Rating:</b>	IC-4 (ta 25°C)	<b>Power Factor:</b>	>0.9
<b>Beam Angle:</b>	24° (19° with pin-hole)	<b>Protection:</b>	Overload / Short Circuit
<b>CRI:</b>	>80 (>90 option)	<b>Lifespan:</b>	>50,000hrs @Ta25°C (L70)
<b>UGR:</b>	<19	<b>Operating Ambient Temperature:</b>	-20 to 45°C
<b>SDCM:</b>	<5 (<3 option)	<b>Smart:</b>	KASTA Compatible
		<b>Dimming:</b>	Phase-Cut Dimmable (Trailing Edge)

### APPLICATIONS

Living Rooms  
Hotels  
Meeting rooms  
Hallways



White




Black



(Pin-hole installed)

### DIMENSIONS

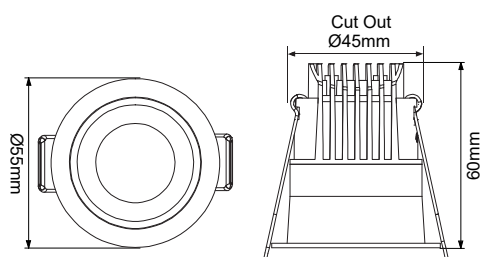

Remote Driver 109x40x22mm

**ARTURA5W**

FIND OUT MORE:

