

PARX G2Thanks for choosing our PARX^{G2} batten products.


We strongly recommend that you read this manual carefully before installation.

Model	Max- Lumen	Power	Operating Temp.	Input Voltage	IP Rating	CCT
PARX75W-AS-4K	11400lm	Min. 50W, Max. 75W	Ta -35°C ~ 50°C	220-240Vac, 50/60Hz	IP65	4000 K
PARX150W-AS-4K	22800lm	Min. 100W, Max. 150W				
PARX200W-AS-4K	30400lm	Min. 175W, Max. 200W				
PARX300W-AS-4K	45600lm	Min. 225W, Max. 300W				

*Accessories to be ordered separately. Refer to Accessory datasheet and installation documents for further information.

WARNING


- Installation must be carried out by a licenced electrician and in accordance with these instructions and relevant Australian standards and local regulations.
- Do not install any luminaire near any heat source.
- Before the installation make sure you have turned OFF the electricity supply.
- Ensure the product is connected to a 220-240V AC 50/60Hz power supply.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or by a service agent or licenced electrician in order to avoid hazard.
- Non-user replaceable light source.
- The lens cover of the luminaire is secured by glue, unremovable.
- The warranty is void if product is not installed according to the instructions.
- Risk of overheating or fire if the clearance distances are compromised.
- Installers must ensure that the fitting selected is appropriate for the intended application and environment, consistent with Haneco's published product specifications.
- To maintain optimal performance, fittings should be kept clean to prevent excessive buildup of dust or debris, with periodic cleaning carried out as appropriate to site conditions.
- Products should not be exposed to harsh chemicals or corrosive substances that fall outside the published product specifications, as such conditions may affect performance or warranty coverage.
- Please refer to Haneco's warranty document for full details on the conditions of warranty.

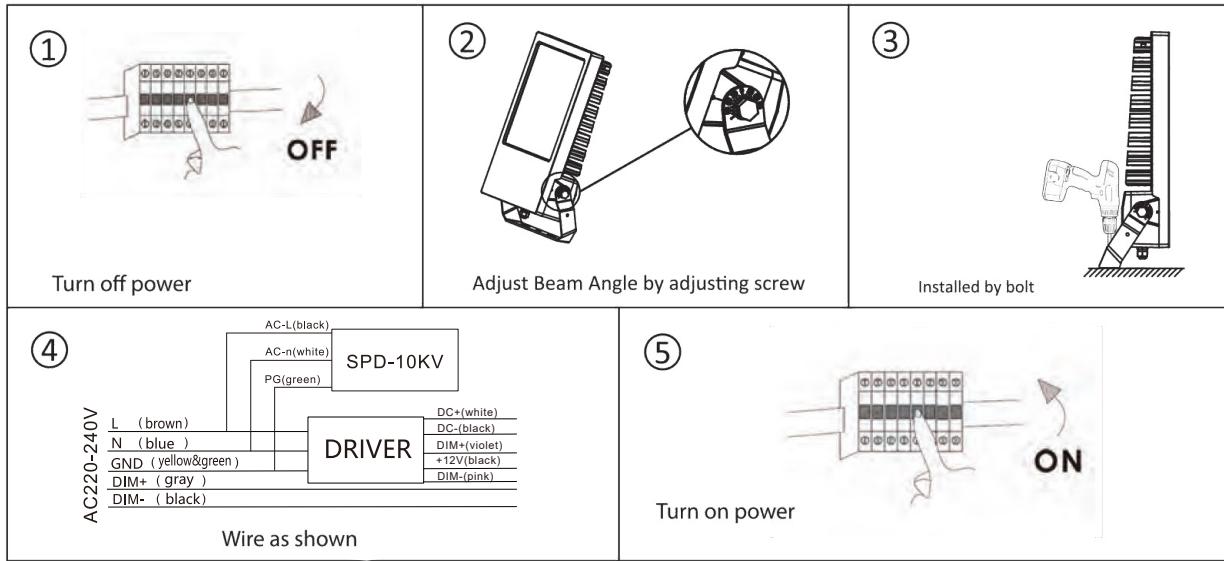INSTALLATION

Note: Do not extend low voltage cables from the output power supply, All components must not be mechanically stressed.

PARX75W-AS-4K
 Product Code: **PARX150W-AS-4K**
PARX200W-AS-4K
PARX300W-AS-4K


PARX G2

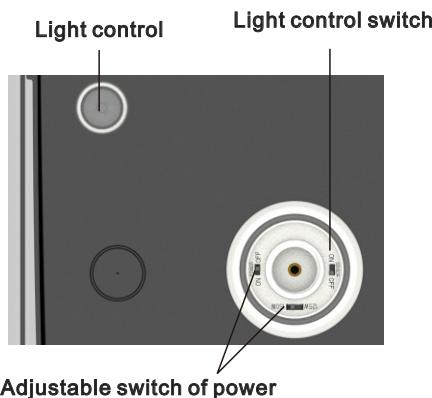


Power Switch Setting

Switch	Location	75W	150W	200W	300W
	L	75W	150W	200W	300W
	M	/	120W	/	275W
	S	60W	100W	175W	250W


Wiring Diagram

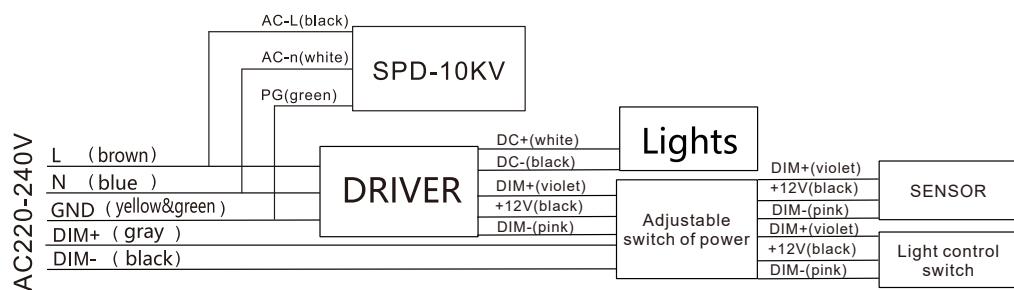


Available models




75W



150W

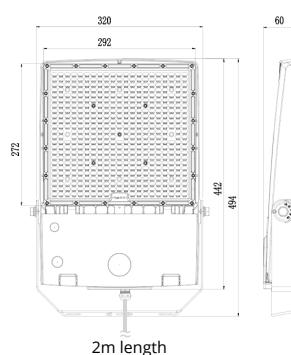

200W

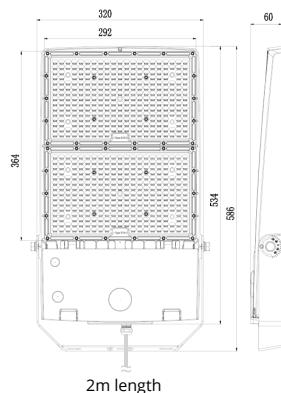

300W