

ARCHISPOT

AS-U/D-TRI-W
SAP CODE: 2002410


Simple elegance.

ARCHISPOT is a decorative wall luminaire providing a contemporary solution for modern exteriors such as porticos and entrances. It features tritone colour selectable technology, allowing for customised lighting to suit any environment. The adjustable models can also be used for accent lighting.


APPLICATIONS

Accent / Display / Feature Lighting,
Garage, Side of Building, Carport, Area
Lighting

DIMENSION DIAGRAMS

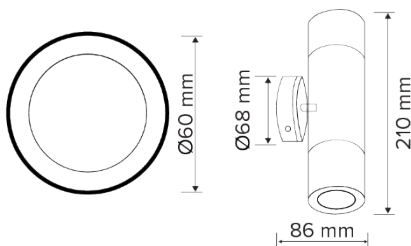

PHOTOMETRIC DIAGRAM

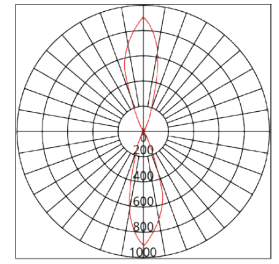

Unit: cd
 - C0/180 35.0deg
 - C90/270 35.0deg

KEY INFORMATION

| | |
|-------------------------|---------------------|
| Power | 12 W |
| Lumen Output | 784 / 842 / 708 lm |
| Mounting Type | Surface Mount |
| Dimming Type | Non-Dimmable |
| Body Colour | White |
| IP Rating | IP65 |
| IK Rating | Not Applicable |
| Operating Ambient Temp. | -20 to 40°C |
| Connection Type | PA12 Terminal Block |
| Driver | Integral |
| Warranty | 3 yrs (1yr lamp) |

PHOTOMETRIC

| | |
|--------------------|------------------------|
| Efficacy | 65 / 70 / 59 lm/W |
| CCT | 3000 / 4000 / 6500 K |
| CRI | > 80 |
| SDCM | < 7 |
| Beam Angle | 48° |
| Flicker-Free | No |
| Projected Lifespan | >36,000hrs@Ta25°C(L70) |

| | |
|---------------------------|--------------------------|
| Input Voltage | 220-240Vac 50/60HZ |
| Power Factor | > 0.9 |
| Electrical Classification | Class I |
| Surge Protection | Overload / Short Circuit |

OTHERS

| | |
|-------------------------|--|
| Body Material | Aluminium |
| Diffuser Material | Polycarbonate (Opal) |
| Rebate Scheme Approvals | Not Applicable |
| Weight | 0.6 kg |
| Dimensions | Ø68 mm Mounting Diameter, Total Light Depth: = 85 x 210 mm |