

HANECO LIGHTING LED INSTALLATION GUIDE

PURO^{G4}

Thanks for choosing our PURO G4 oyster light products.
We strongly recommend you read this guide carefully before installation.

⚠ WARNING


- The luminaire must be installed by a licensed/qualified electrician in accordance with local wiring and relevant Australia standard.
- Ensure to disconnect mains supply before conducting any installation and maintenance the luminaire.
- Ensure input voltage conforms to the voltage range of product.
- Ensure all the wiring is correct and secured before connecting mains supply to the luminaire.
- Warranty is void if product is not installed according to the instructions.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Note: Product technical information and specification may change over time without prior notice. For latest information, please contact our customer service or visit our website www.haneco.com.au


Product Specifications

Product Code	Power Switchable	CCT	Input	IP Rating	Ta.	Dimensions	Fix Hole Center
PURO11W-250R	8W / 10W / 11W	3000K / 4000K / 5700K	220-240V, 50/60Hz	IP54	-20°C to 45°C	Ø250 x 70mm	R: 180mm
PURO14W-300R	8W / 10W / 11W / 14W					Ø300 x 75mm	R: 239mm
PURO14W-300R-MS						Ø350 x 70mm	R: 258mm
PURO18W-350R	9W / 12W / 18W					Ø350 x 70mm	R: 258mm
PURO18W-350R-MS	11W / 14W / 24W					Ø400 x 65mm	R: 306mm
PURO24W-400R						Ø400 x 65mm	R: 306mm
PURO24W-400R-MS							


Installation Instructions

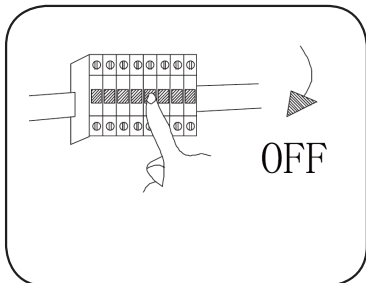


1. Switch OFF main power supply.

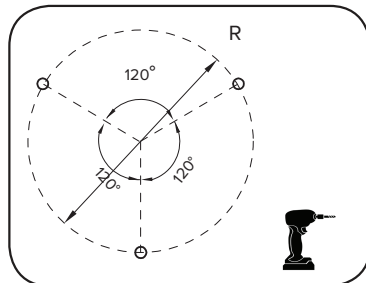


2. Drill installation holes in ceilings

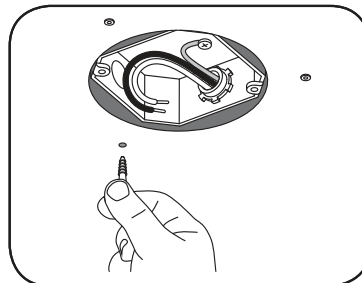


3. Install 3 drywall anchors.

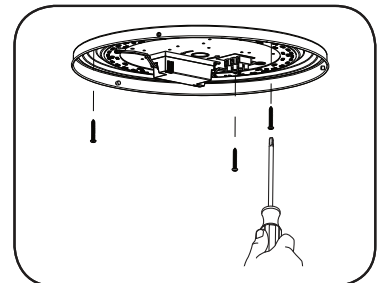


4. Run power cord through the central hole of base and screw base to ceiling. Do not touch LED Chips while performing this step.

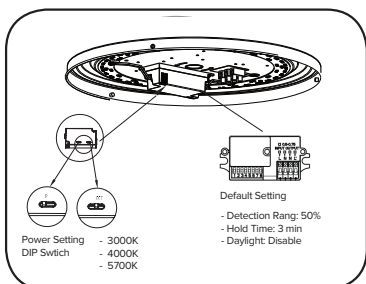


5. Dip the switches to the required sensor*, power and colour temperature settings.
* For Sensor Version

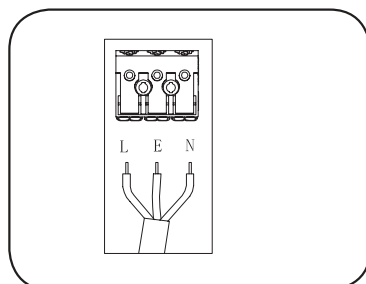

6. Connect power cord to terminals as shown in the diagram.

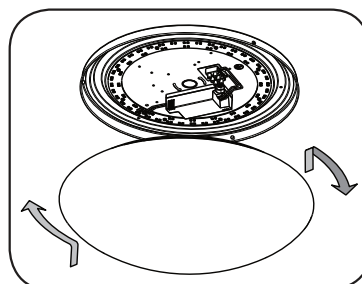

7. Reattach cover.

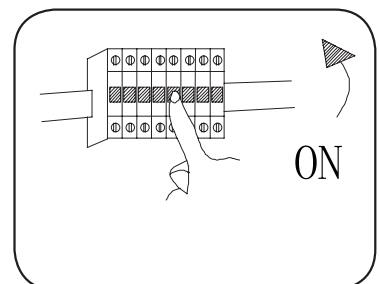

1. Switch OFF main power supply.

Product Code : PURO11W-250R PURO18W-350R-MS
 PURO14W-300R PURO24W-400R
 PURO14W-300R-MS PURO24W-400R-MS
 PURO18W-350R