



ASTRAL EVO

AST9W-EV
SAP CODE: 2002621


Modular, Low Glare Downlight

ASTRAL EVO with deep-recessed visual comfort in a surprisingly slim 49 mm profile — refined in design, minimal in space impact. Its modular design allows interchangeable matt white or silver reflectors, adapting easily to different interior styles.


APPLICATIONS

Bedrooms, Bathrooms, Dining Area, Hotel Rooms, Indoor Recreation, Laundry, Accent / Display / Feature Lighting, Butler Pantry

DIMENSION DIAGRAMS

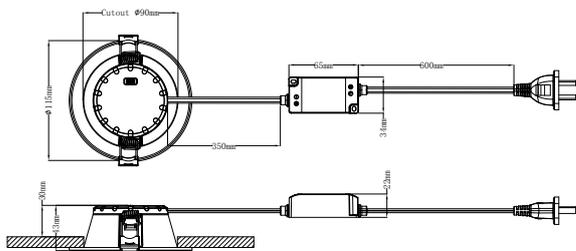

PHOTOMETRIC DIAGRAM

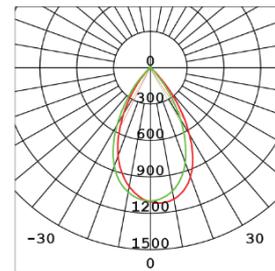

Unit: cd
 — C0/180 58.6deg
 — C90/270 58.3deg
 Photometric diagram shown is for 3000K output.

KEY INFORMATION

Power	9 W
Lumen Output	1001 / 927 lm
Cutout Size	Ø 90 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%), DALI optional
Body Colour	White
IP Rating	IP54 F - IP20 B
IC Rating	IC-4
Operating Ambient Temp.	-20 to 40°C
Connection Type	0.6m Flex & Plug
Driver	Remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	118 / 110 lm/W
CCT	3000 / 4000 K
CRI	> 90
SDCM	< 3
UGR	< 19
Beam Angle	60°
Flicker-Free	Yes
Projected Lifespan	50,000hrs @ Ta25°C(L80B50)

ELECTRICAL

Input Voltage	220-240Vac 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	Not Applicable
Body Material	Plastic
Diffuser Material	Polycarbonate Lens
Rebate Scheme Approvals	Not Applicable
Weight	0.25 kg
Dimensions	Ø115 x 42 mm