



# ASTRAL<sup>EVO</sup>

## Residential Downlight



### Modular, Low Glare Downlight.

ASTRAL<sup>EVO</sup> with deep-recessed visual comfort in a surprisingly slim 49 mm profile — refined in design, minimal in space impact. Its modular design allows interchangeable matt white or silver reflectors, adapting easily to different interior styles.

### Features

- Exceptional performance
- High Colour Rendering Index (CRI)
- Low Unified Glare Rating (UGR)
- Selections of reflectors
- Dual colour selectable
- Flicker-free driver

### Benefits

- High efficacy rating to promote energy saving
- True colour definition to highlight natural colour
- Excellent lighting option for indoor work places
- Covers a diverse range of applications
- Provides the choice of light hues from a single luminaire
- Increase productivity and lowers eye strain


PRODUCT CODE	POWER	LUMENS	EFFICACY	CCT	WEIGHT	COLOUR	SAP CODE
AST9W-EV	9 W	1001 / 927 lm	118 / 110 lm/W	3000 / 4000 K	0.25 kg	WHITE	2002621

SPECIFICATIONS			
Body Material:	Polyamide	Driver:	Remote
Diffuser Material:	Polycarbonate Lens	Connect Type:	0.6m Flex & Plug
Body Colour:	White	Electrical Classification:	Class II
IP Rating:	IP54 (front only)	*Projected Lifespan:	72,000hrs @ Ta25°C(L80B50)
IC Rating:	IC-4	Operating Ambient Temp.	-20 to 40°C
Flick-free Driver:	Yes	Power Factor:	> 0.9
Beam Angle:	60°	Surge Protection:	Overload / Short Circuit
CRI	> 90	UGR	< 19
SDCM:	< 3	Smart:	KASTA Compatible
Dimming:	Phase-Cut Dimmable (Trailing Edge, 10-100%) / DALI		

APPLICATIONS	
Bathrooms	Offices
Boardroom / Meeting Rooms	Retail Spaces
Cocktail Lounge	Showrooms
Medical Facilities	Restaurants / Cafes
Hotel Common Areas	Entrance
Hotel Rooms	Food Courts

\*Based on rated LED design life

### DIMENSIONS

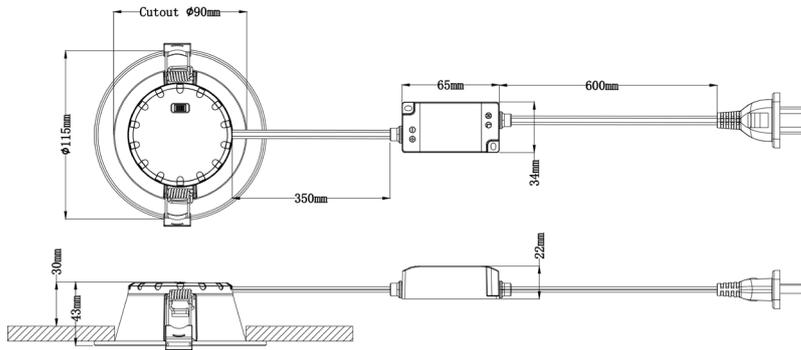

AST9W-EV  
AST9W-EV-BK

### Accessories



EV-REF-WH



EV-REF-SIL

