


SKYLUX-FG^{PRO}

FoodGrade Highbay
ZHAGA Sensor




Optional Accessories

INSTALLATION GUIDE

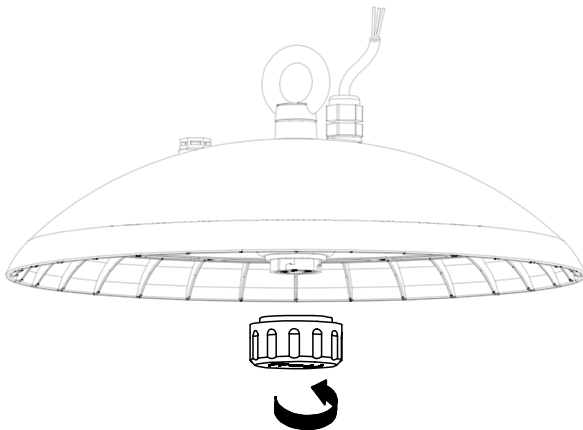

SLFGPSENSOR



- Please read instruction carefully before assembling and installation
- Please keep instruction as reference in the future


●WARNING

1. Ensure that any installation and maintenance be performed by a qualified electrician and the luminaire is wired in accordance with the local wiring and relevant Australia standards.
2. Ensure that the power supply is off before starting installation and maintenance. Do not switch on until the installation or maintenance is completed.
3. Make sure the luminaires are grounded.

● SENSOR INSTALLATION


Step 1: Secure the Eyebolt

Lock the eyebolt into place, ensuring it is tightly fixed to the luminaire body.

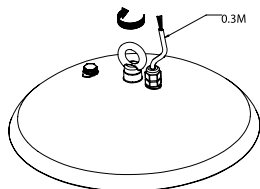


Step 3: Adjust the Lumen Output (Optional)

Set the desired lumen output using the lumen select switches. If you're using the default output, skip this step.

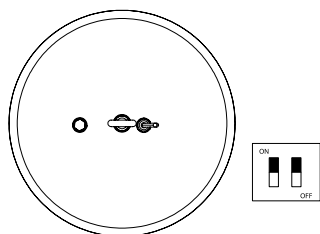

Step 5: Install the Sensor

Unscrew the protective cap from the Zhaga socket. Attach the sensor to the socket securely.

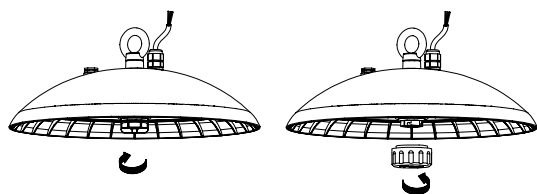

Step 7: Connect the Wiring


Refer to the wiring diagram:

- Live (L): Brown wire
- Neutral (N): Blue wire

Connect the wires accordingly and light up the luminaire.


Step 2: Remove the Sealing Cap (Optional)

If you're not using the default output, use a spanner to unlock and remove the sealing cap. Otherwise, skip this step.




Step 4: Reinstall the Sealing Cap (Optional)

Use a flat-head screwdriver to securely tighten the sealing cap after adjusting the lumen settings.

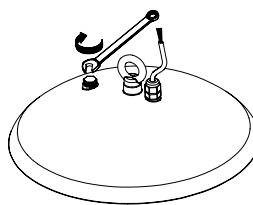

Step 6: Mount the Luminaire

Hang the luminaire using the eyebolt on a fixed safety hook or a closed link chain. Ensure it is properly secured.

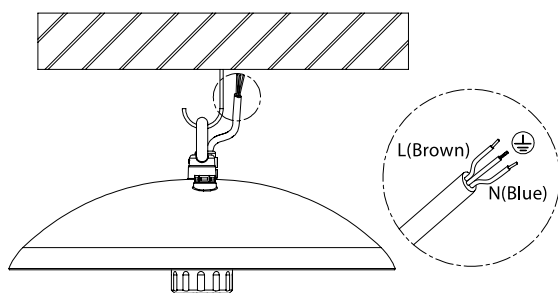

SERVICE CONTACT:



HANECO

Haneco Lighting Australia Pty Ltd
262 Marion Road, Netley, South Australia 5037
Haneco.com.au
1300 001 533