





ASTRO

ASTRO30W-SM

SAP CODE: 2002008

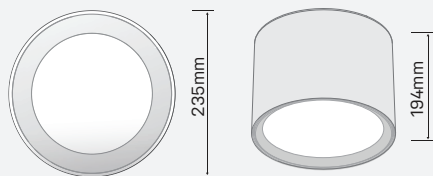

Photometric Diagram



Unit: cd
 - C0/180 55.0deg
 - C90/270 55.2deg

High Output Surface Mount Commercial Downlight

Deep recessed 24/32W High Output Tritone Downlight with remote diver and polish reflector with surface mount box

KEY INFORMATION

Lumen Output	32W 24W	2850 / 3100 / 3000lm 2100 / 2300 / 2200lm
Input Power	32W, 24W	
Hole Cutout Size	N/A	
Install	SURFACE MOUNT	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	4yr	
IP Rating	IP20	
IK Rating	N/A	
IC Rating	N/A	
Rebate Scheme Approvals		

PHOTOMETRIC

Efficacy	32W 24W	89 / 97 / 94lm/W 88 / 96 / 92lm/W
LED	SMD	
CCT	3000 / 4000 / 5700K	
CRI	>80	
Beam Angle	53°	

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	45V DC
Power Factor	>0.9
LED Input Current (nominal)	700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Plate
Connection Type	Terminal Block
Total Weight	N/A
Dimensions	Ø235 x 198mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2