

# ATLAS

*Classic Form. Contemporary Performance.*



>80

CRI Colour  
Rendering  
Index



IP66

Ingress  
Protection  
Rating



IK08

Impact  
Rating



Flicker

Free



**ATLAS** blends a retro dome aesthetic with advanced outdoor performance. Dark sky compliant and finished in warm 2700K, it respects both architecture and environment. With DALI dimming, tool-free maintenance, and IP66 protection, ATLAS is built for long-term public and streetscape installations.



**APPLICATIONS:**

**Residential:** Garden pathways, outdoor recreation areas  
**Public & Commercial:** Area lighting, car parks, road lighting


IP RATING IP66	CRI > 80	BEAM ANGLE Type II	FLICKER-FREE YES	OPERATING TEMP. -30 to 50°C
PRODUCT COLOUR Anthracite grey (RAL7016)	PROJECTED LIFESPAN >100,000hrs @ Ta 25°C	WARANTY 5 Years		



Classic Form.  
Contemporary  
Performance.





**PHOTOMETRIC DIAGRAM**

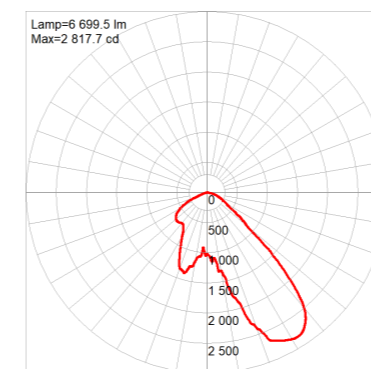

**ELECTRICAL**

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.90
Electrical Classification	Class I
Surge Protection	10kV

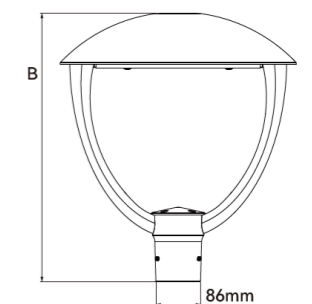

**KEY INFORMATION**

Product Code	Power	Lumen	CCT	IK Rating	Dimming	Driver
ATLS40W827T2	40W	4,400 lm	2700 K	IK08	DALI Dimmable	In Built
ATLS60W827T2	60W	6,700 lm				

**DIMENSIONS & WEIGHTS**

Product Code	A x B (mm)	Weight (kg)
ATLS40W827T2	Ø460x523	8.0
ATLS60W827T2	Ø460x523	8.0