



AURORA⁸⁰

Residential Downlights

Compact and versatile.

TRITONE
Colour
Selectable

95°
Beam
Angle

IP54*
Ingress
Protection
Rating
*From below only

DIM
Phase Cut
Dimming

>80
CRI Colour
Rendering
Index

Flicker
Free

54,000hr
Projected
Lifespan

5yr
Warranty

Experience the elegance and versatility of the AURORA 80, a compact yet powerful downlight designed to illuminate even the most challenging spaces. With its sleek design and advanced features, the AURORA 80 offers the same sophisticated appeal as its larger counterpart, the AURORA, in a more compact form.


Features

- Tritone colour selectable
- Flicker free driver
- Excellent feature lighting option
- IP54 rating (from below)
- Dimmable Driver
- Painted aluminium housing

Benefits

- Provides the choice of light hues from a single luminaire
- Increase productivity and lowers eye strain
- Ideal for accent lighting
- Suitable for wet rooms such as bathrooms & laundries
- Adjustable brightness to improve comfort
- Enhances the premium look and feel

*From below only

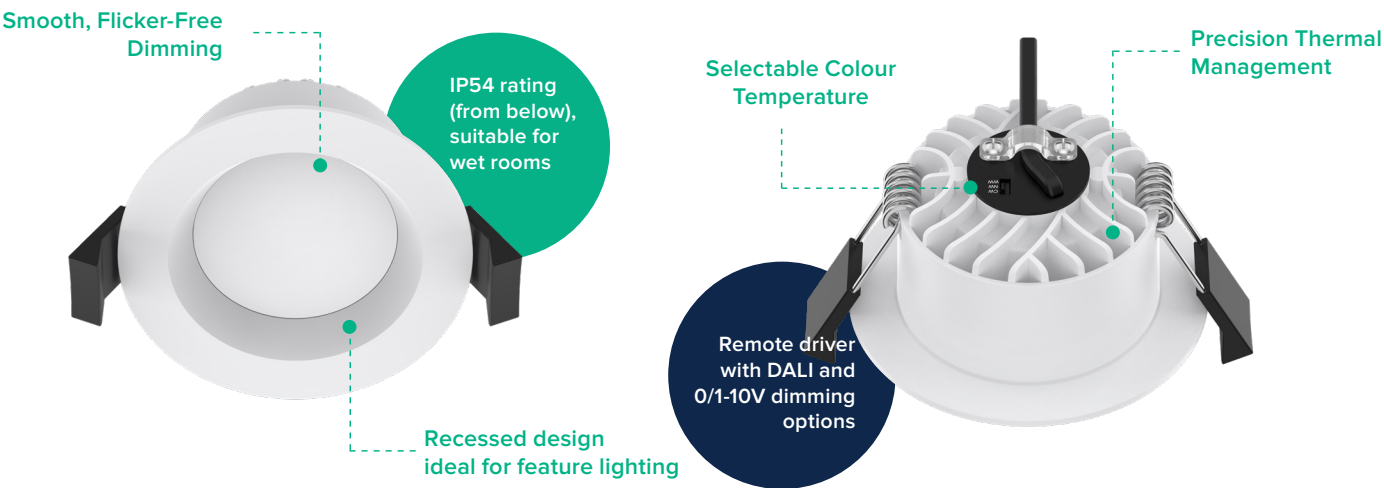

Residential Downlights

Product Overview

POWER	LUMENS	EFFICACY	CCT	CUTOUT SIZE	WEIGHT	SAP CODE	PRODUCT CODE
7W	665/708/669 lm	95/101/95 lm/W	3000K/4000K/5700K	Ø70 mm	0.2kg	2002342	AURORA80-WH

SPECIFICATIONS		APPLICATIONS	
Body Material:	Aluminium	<div>Bedrooms Accent / Display / Feature Lighting Walk-in Wardrobes Theatre Rooms Games Rooms Hotel Rooms</div>	
Diffuser Material:	Polycarbonate (Opal)		
Fascia Colour:	White RAL9016		
Beam Angle:	95°		
Flicker Free	yes		
IP Rating*:	IP54		
IC Rating:	Do Not Cover		
CRI:	>80		
Connection Type:	0.9m Flex & Plug		
Driver :	Remote		
Input:	AC220-240V, 50/60Hz		
Electrical Classification:	Class II		
Power Factor:	>0.9		
Protection:	Overload / Short Circuit		
Lifespan:	>54,000hrs @ 25°C L70		
Operating Ambient Temperature:	-25°C-45°C		
Smart:	KASTA compatible		
Dimming:	Phase-Cut Dimmable (Trailing Edge, 10-100%) DALI and 0/1-10V options available		

*IP Rating is from below only

DIMENSIONS

