



## AURORA TRITONE


AURORA-WH-TRI  
2002336

### ALL FEATURES IN A SLIMLINE PACKAGE.


AURORA TRITONE is a premium look and and feel luminaire courtesy of an aluminium construction. Superior features such as low-profile, dimmable colour hues make it ideal for shallow ceiling spaces. With a choice of multiple finishes it will fit any high end applications.

#### APPLICATIONS

Lounge Room  
Dining Area  
Kitchen / Food Prep  
Laundry  
Butler Pantry  
Hallway  
Entrance  
Staircase  
Bathroom  
Ensuite  
Walk-In Wardrobe  
Theatre Room  
Games Room  
Balconies / Patios / Verandah  
Awnings  
Garage  
Showroom  
Office  
Boardroom / Meeting Rooms  
Function Areas  
Hotel Rooms  
Restaurants / Cafés  
Cocktail Lounge

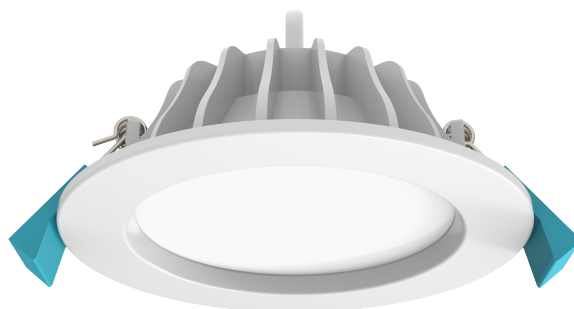

#### PHOTOMETRIC DIAGRAM



Unit: cd  
- C0/180 100.0deg  
- C90/270 100.0deg

#### KEY INFORMATION

Power	10 W
Lumen Output	950 / 1100 / 1000 lm
Cutout Size	90 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP44
IC Rating	IC-4
Rebate Scheme Approvals	Not Applicable
Driver	Remote
Warranty	5 Years

#### PHOTOMETRIC

Efficacy	90 / 100 / 95 lm/W
CCT	3000 / 4200 / 5700 K
CRI	> 80
SDCM	< 5
UGR	< 31
Beam Angle	100°
Flicker-Free	✓
Lifespan	>50,000hrs@Ta25°C(L70)

#### ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	CLASS II
Surge Protection	Overload / Short Circuit

#### OTHERS

Angle Flexibility	Not Applicable
Body Material	Aluminium
Diffuser Material	Polycarbonate (Opal)
Operating Ambient Temp.	-25 to 45°C
Connection Type	1m Flex & Plug
Weight	0.3 kg
Dimensions	Ø110 mm x 37.5 mm