


# AURORA SQUARE

AURORASQ150A02

SAP CODE: 2000056

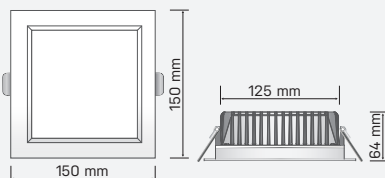


18W, 125mm, 5000K, square LED downlight, white trim, recessed square diffuser

A dimmable LED downlight with a square recessed opal diffuser and a square white trim for protected outdoor applications.



Photometric Diagram

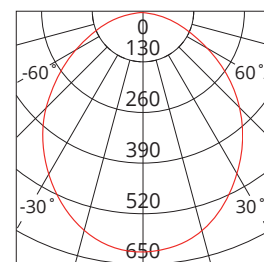

Unit: cd  
 - C0/180 85.0deg  
 - C90/270 85.0deg

## KEY INFORMATION

Lumen Output	1380lm
Input Power	18W
Hole Cutout Size	125x125mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP54
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

## PHOTOMETRIC

Efficacy	77lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	90°

## ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	42VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Metal Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.7kg
Dimensions	150x150x64mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.