


AURORA SQUARE

AURORASQ190A4K

SAP CODE: 2000058

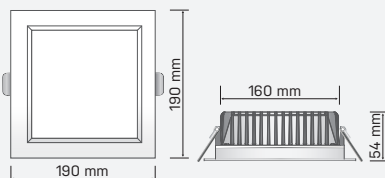


26W, 190mm, 4000K,
square LED downlight,
white trim, recessed
square diffuser

A powerful, dimmable LED
downlight with a square
recessed opal diffuser and a
square white trim.



Photometric
Diagram

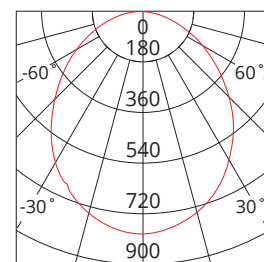

Unit: cd
- C0/180 90.0deg
- C90/270 90.0deg

KEY INFORMATION

Lumen Output	2010lm
Input Power	26W
Hole Cutout Size	160x160mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP40
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	77lm/W
LED	SMD
CCT	4000K
CRI	>80
Beam Angle	90°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	32VDC
Power Factor	>0.9
LED Input Current (nominal)	700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Metal Clip
Connection Type	1.1m Flex & Plug
Total Weight	1.3kg
Dimensions	190x190x54mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.