

INSTALLATION GUIDE

AXIS LED BOLLARD LIGHT




Product code: AXIS14W830T5-09M, AXIS24W830T5-09M

Packing List		
	Base plate templates	1PCS
	Screw fixing plate	1PCS
	Screw M5*16	5PCS
	Screw M8	3PCS
	Nut M8	3PCS




0.9M


Physical Dimensions(mm/inch)





Installation

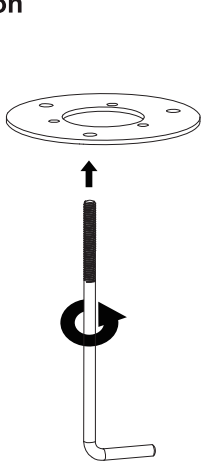

1

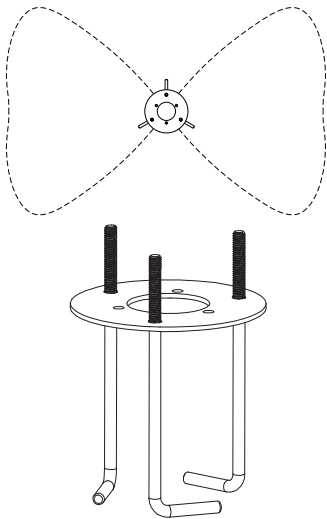


2

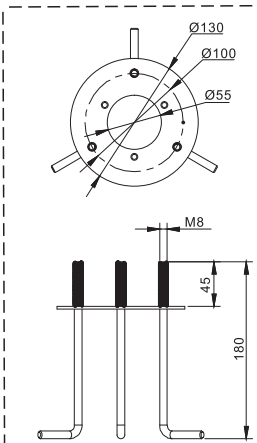

Hole Diameter:
Ø30-55mm

3


Suggested cement
column size




4

AXIS LED BOLLARD LIGHT

Instruction Manual

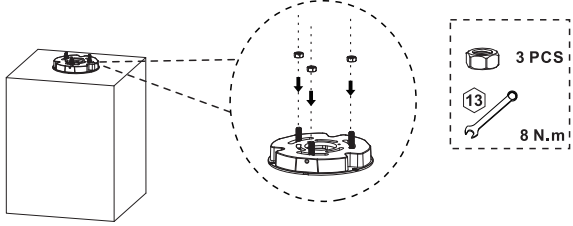



5

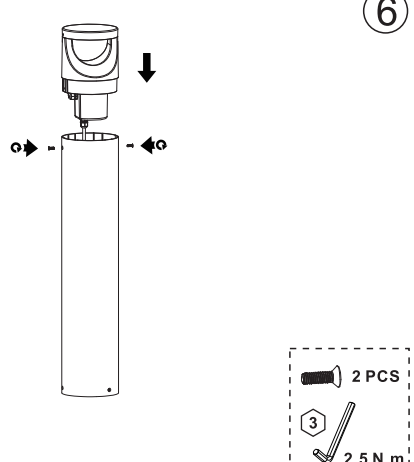


6

The direction of light should be on both side of notch. Please install bollard head properly.

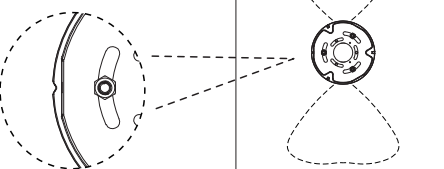


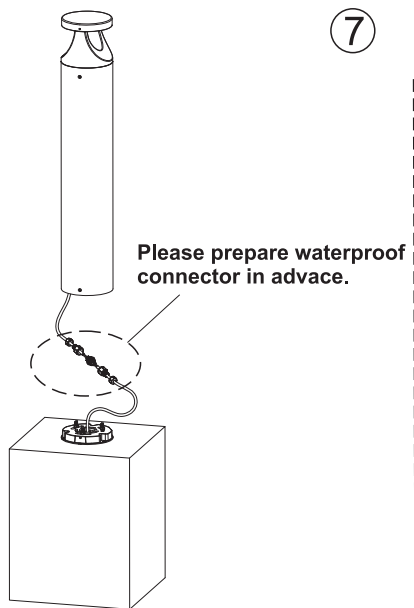

7

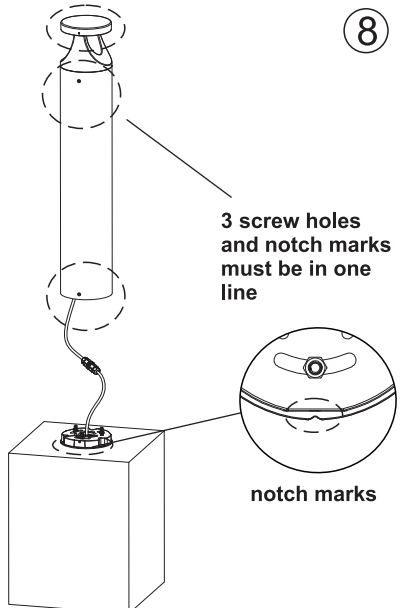

8

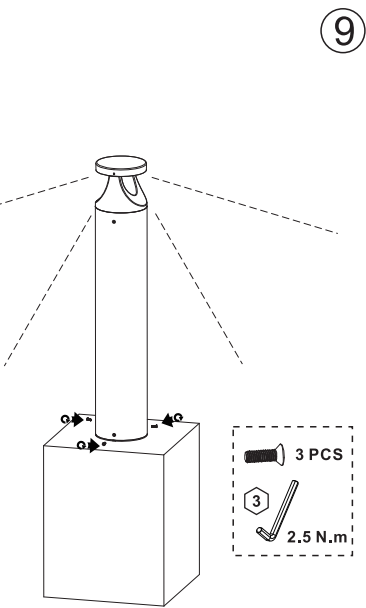

9

Product Specifications	14W	24W
Input Voltage	100-240 Vac / 120-240Vac / 220-240Vac	
Power Frequency	50 / 60 Hz	
Size	Ø165×900mm (Ø6.5"×35.43")	
Net Weight	6.16±0.3kg (13.58±0.66Lbs)	
Working Temperature	-30°C to + 50°C(-22°F to +122°F)	
Storing Temperature	-40°C to + 70°C(-40°F to +158°F)	

AC cords

 Class I	L	brown		black
	N	blue		white
		yellow/green		green
 Class II	L	brown		black
	N	blue		white

DIM cords

Note: color for dim cords subject to the cable label on luminaire



Warning! do not wire dim cord to high voltage, or dim function will fail.

- This luminaire can be outdoor use.
- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.