

AXIS

Architectural Form. Built to Perform.



>80
CRI Colour
Rendering
Index



IP66
Ingress
Protection
Rating




IK10
Impact
Rating



Flicker
Free



POLE MOUNT LED BOLLARD

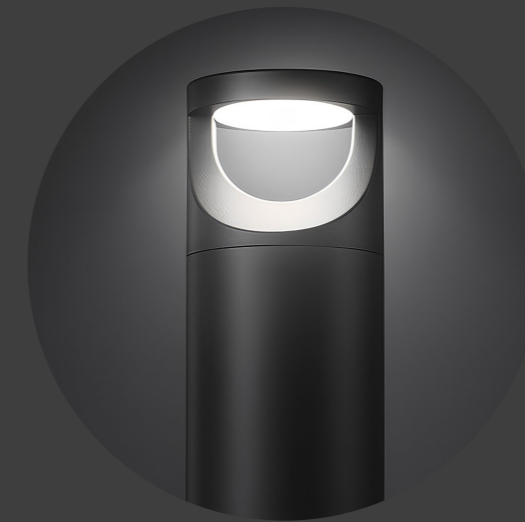

AXIS delivers modern architectural styling with serious durability. Featuring IK10 impact resistance, IP66 protection, and low-glare output, it's designed for high-traffic environments while maintaining clean visual appeal. Rated for 50°C ambient conditions.

APPLICATIONS:

Residential: Carports, garden pathways, outdoor areas

Hospitality & Leisure: Hotel common areas, outdoor areas

Public & Commercial: Public facilities, side of building applications, road lighting, streetscapes

IP RATING IP66	CRI > 80	BEAM ANGLE Type V	FLICKER-FREE YES	OPERATING TEMP. -30 to 50°C
PRODUCT COLOUR Black RAL9017	PROJECTED LIFESPAN >78,000hrs @ Ta 25°C (L80)	WARANTY 5 Years		




Architectural
Form. Built to
Perform.

KEY INFORMATION

Product Code	Power	Lumen	CCT	IK Rating	Dimming	Driver
AXIS14W830T5-09M	14W	1190 lm	3000 K	IK10	Non-Dimmable	In Built
AXIS24W830T5-09M	24W	1920 lm				



PHOTOMETRIC DIAGRAM

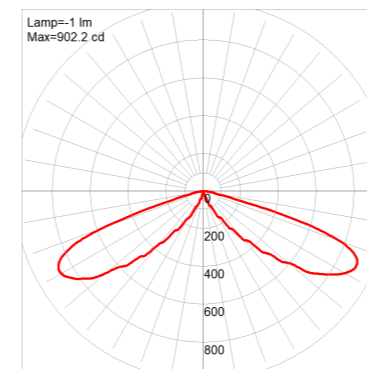

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.90
Electrical Classification	Class I
Surge Protection	10kV

DIMENSIONS & WEIGHTS

Product Code	A x B (mm)	Weight (kg)
AXIS14W830T5-09M	Ø 203 x 975	7.2
AXIS24W830T5-09M	Ø 203 x 975	7.2

