


AURORA SQUARE

AuroraSQ220A02

SAP CODE: 2000060

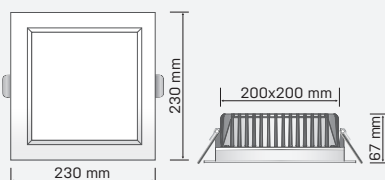


28W, 220mm, 5000K, square LED downlight, white trim, recessed square diffuser

A large, powerful, dimmable LED downlight with a square recessed opal diffuser and a square white trim.



Photometric Diagram

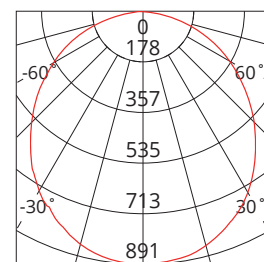

Unit: cd
 - C0/180 85.0deg
 - C90/270 85.0deg

KEY INFORMATION

Lumen Output	2460lm
Input Power	28W
Hole Cutout Size	200x200mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP40
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	88lm/W
LED	SMD
CCT	5000K
CRI	>80
Beam Angle	90°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	30VDC
Power Factor	>0.9
LED Input Current (nominal)	900mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Metal Clip
Connection Type	1.1m Flex & Plug
Total Weight	1.4kg
Dimensions	230x230x67mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.