



# BLADE<sup>G2</sup>

## Indoor Battens

Modern, low profile design.

BLADE G2 is a sleek and modern LED batten, ideal when low profile and high output is required. This aesthetically pleasing batten delivers cost savings without compromising light output.

### Features

- Tritone selectable
- 100mm wide body
- Ultra low profile design
- Clip on installation using supplied brackets
- Cable management channel

### Benefits

- Reduced SKUs and inventory levels
- Ideal for retrofit
- Compact for shallow spaces
- Quick and easy installation
- Allows for centre mounting and tidy installation



IP20  
Ingress  
Protection  
Rating



TRITONE  
Colour  
Changeable



CLASS II  
Double Insulated



50,000hr  
Expected  
Lifetime



5yr  
Warranty

## Product Overview

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W	2000lm/2200lm 2000lm	Up to 117lm/W	4000K/4700K/ 5700K	620 x 100 x 30mm	0.9kg	2002306	<b>BLADE06-TRI</b>
40W	4000lm/4400lm 4000lm	Up to 121lm/W		1215 x 100 x 30mm	1.5kg	2002307	<b>BLADE12-TRI</b>

### SPECIFICATIONS

<b>Body Material:</b>	Aluminium	<b>Driver:</b>	Integral
<b>Diffuser Material:</b>	Polycarbonate (Opal)	<b>Power Lead:</b>	PA12 Terminals
<b>Body colour:</b>	White	<b>Input:</b>	220-240V, 50/60Hz
<b>IP Rating:</b>	IP20	<b>Electrical Classification:</b>	Class II
<b>Beam Angle:</b>	120°	<b>Power Factor:</b>	>0.9
<b>CRI:</b>	>80 (>90 option)	<b>Protection:</b>	Overload / Short Circuit
<b>SDCM:</b>	<5	<b>Lifespan:</b>	>50,000hrs @Ta25°C (L70)
		<b>Operating Ambient Temperature:</b>	-20 to 45°C
		<b>Dimming:</b>	Non-Dimmable

### APPLICATIONS

Kitchen / Food Prep  
 Laundry  
 Entrance  
 Garage  
 Boardroom / Meeting Rooms  
 Function Areas  
 Education Facilities  
 Store Rooms

Indoor Battens




Low Profile Design




Cable Access and Mounting Brackets

### DIMENSIONS

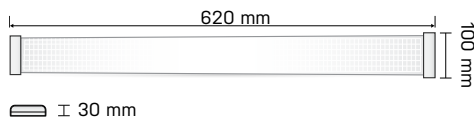

**BLADE06-TRI**

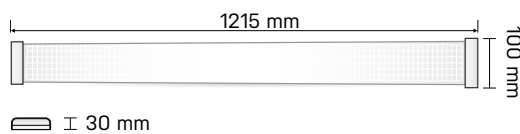

**BLADE12-TRI**

FIND OUT MORE:

