



CEDAR TRI

CEDAR-RND-TRI

SAP CODE: 2002341


Recessed adjustable design.

The New CEDAR is a powerful and economical, adjustable shoplight with multifaceted reflector technology and frosted lens for ideal glare control, complete with tritone colour options and phase cut dimming capabilities.

APPLICATIONS

Cocktail Lounge, Food Courts, Medical Facilities, Hotel Common Areas, Restaurants / Cafes, Retail Spaces, Showrooms

DIMENSION DIAGRAMS

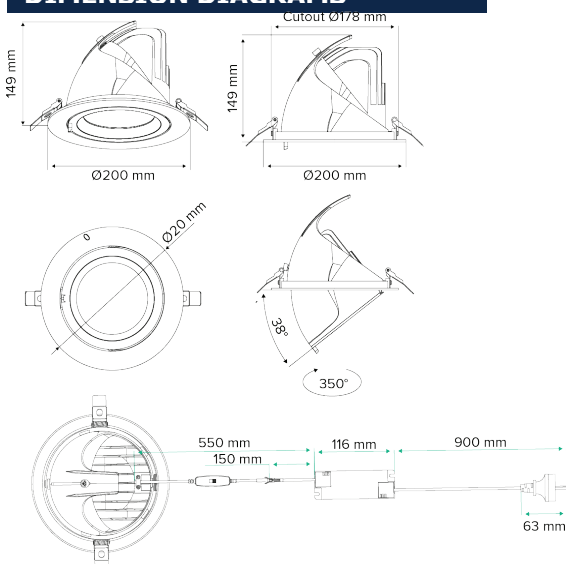


haneco.com.au

Disclaimer

NOTE1: CRI values measured on 4K CCT

Specification subject to change without prior notice. Last updated 21/10/2025

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180 34.1deg
— C30/210 33.7deg
— C60/240 34.3deg
— C90/270 34.9deg

KEY INFORMATION

Power	26W 30W 34W 38W
Lumen Output	2564 / 2760 / 2452 lm 2898 / 3165 / 3084 lm 3201 / 3507 / 3374 lm 3419 / 3793 / 3462 lm
Cutout Size	Ø 180 mm
Mounting Type	Recessed
Dimming Type	Non-Dimmable
Body Colour	White
IP Rating	IP20
IC Rating	Do Not Cover
Operating Ambient Temp.	-20 to 45°C
Connection Type	1.5 m Flex & Plug
Driver	remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	26W: 102/114 / 106 lm/W 30W: 98 / 112/ 102 lm/W 34W: 95 / 110/ 99 lm/W 38W: 93 / 108 / 96 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 80
SDCM	< 3
UGR	< 19
Beam Angle	36°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs@Ta45°C(L70)

ELECTRICAL

Input Voltage	220-240Vac, 50-60Hz
Driver Output Voltage	30 - 42 Vdc
Driver Output Current	650 / 750 / 850 / 930 mA
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	0 - 38°
Body Material	Aluminium
Diffuser Material	Polycarbonate (Clear)
Rebate Scheme Approvals	Not Applicable
HACCP Approval	No
Weight	1.005 kg
Dimensions	Ø200 x 149 mm