



CENTAURI

Commercial Downlights


CLASS 2
Double Insulated


TRITONE
Colour Changeable


2POWER
Switchable Modes


DIM
Phase Cut Dimming


IP44
Ingress Protection Rating


50,000hr
Expected Lifetime


5yr
Warranty

Ultra-low-profile.

The ultra-low-profile design of CENTAURI makes it the perfect solution for installations where ceiling space is minimal. This dimmable downlight strikes with a slightly recessed, aesthetically pleasing diffuser, robust aluminium housing and all around IP44 rating for increased flexibility.

Features

- Tritone and power switchable
- Ultra-low-profile design
- Diecast aluminium housing
- Complete with flex and plug
- Remote phase-cut dimmable driver
- IP44 from below and above

Benefits

- Reduced SKUs and inventory levels
- Perfect where ceiling space is minimal
- Improved thermal characteristics
- Quick and easy installation
- Enhanced comfort and energy saving
- Suitable for most applications

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	SAP CODE	PRODUCT CODE				
10W	1010 lm	101 lm/W	3000K	Ø105-135mm	0.75kg	2001195	C10/15W150R-MULTI				
	1090 lm	109 lm/W	4000K								
	1090 lm	109 lm/W	5000K								
15W	1440 lm	96 lm/W	3000K								
	1520 lm	101 lm/W	4000K								
	1490 lm	99 lm/W	5000K								
15W	1470 lm	98 lm/W	3000K					Ø170-180mm	0.96kg	2001087	C15/25W190R-MULTI
	1600 lm	107 lm/W	4000K								
	1610 lm	107 lm/W	5000K								
25W	2500 lm	100 lm/W	3000K								
	2680 lm	107 lm/W	4000K								
	2640 lm	106 lm/W	5000K								
20W	2090 lm	105 lm/W	3000K	Ø185-215mm	1.20kg	2000576	C20/30W230R-MULTI				
	2250 lm	113 lm/W	4000K								
	2220 lm	111 lm/W	5000K								
30W	3040 lm	101 lm/W	3000K								
	3130 lm	104 lm/W	4000K								
	3090 lm	103 lm/W	5000K								

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Opal)	Power Lead:	1.2m Flex & Plug
Fascia Colour:	White: RAL9003	Link Lead:	300mm Cable with Flat JST Connector
IP Rating:	Front: IP44 Body: IP44	Input:	220-240V, 50/60Hz
IC Rating:	IC-4	Electrical Classification:	Class 2
Beam Angle:	100°	Power Factor:	>0.9
CRI:	>80 (>90 option)	Protection:	Overload / Short Circuit
SDCM:	<5 (<3 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
		Operating Ambient Temperature:	-20 to 45°C
		Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge)
			DALI Dimmable Models Available. See Page 212.

APPLICATIONS

Retail
Hospitality

ACCESSORIES

C20/30W230R-MULTI:


Adaptor Ring Ø280mm
(Cut Out Ø230-260mm)
TRIM-C2030-280-W
(SAP 2001219)



Adaptor Ring Ø310mm
(Cut Out Ø230-280mm)
TRIM-310-W
(SAP 2002222)



DIMENSIONS

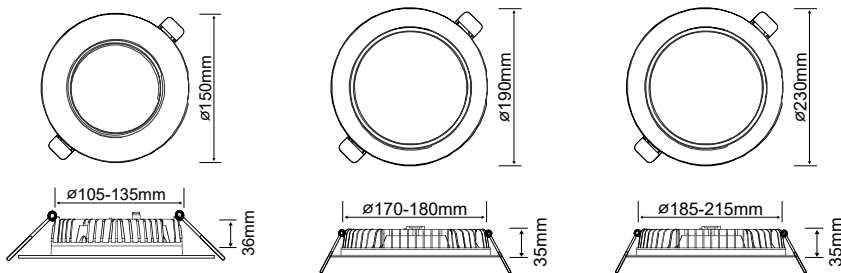

Remote Driver: 115 x 45 x 28mm

C10/15W150R-MULTI

Remote Driver: 140 x 45 x 30mm

C15/25W190R-MULTI

Remote Driver: 140 x 45 x 30mm

C20/30W230R-MULTI

FIND OUT MORE:

