



# DIONE

D15W109R3KS

SAP CODE: 2000144

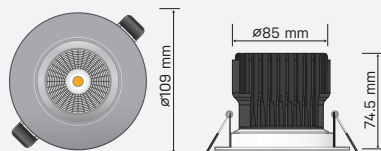

Photometric Diagram

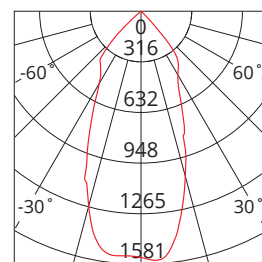

Unit: cd  
 - C0/180 45.0deg  
 - C90/270 45.0deg

## Silver trim, narrow beam LED downlight

A sleek dimmable downlight that appears flush to the ceiling with a narrow beam (45°).

### KEY INFORMATION

Lumen Output	1190lm
Input Power	15W
Hole Cutout Size	Ø85mm
Dimming Options	*Phase-Cut Dimming
Trim Colour	SILVER
Warranty	5yr
IP Rating	IP54
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

### PHOTOMETRIC

Efficacy	79lm/W
LED	COB
CCT	3000K
CRI	>80
Beam Angle	45°

### ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	37VDC
Power Factor	>0.9
LED Input Current (nominal)	350mA
Useful life @Ta25° (L70)	50,000hr

### CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Multifaceted Reflector
Adjustable Angle	0-30°
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.91kg
Dimensions	Ø109x75mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.