


DISCUS DISC25W300R-MS






25W, Ultra-slim, Weather Resistant, Tritone LED Oyster with Sensor

A sleek, aesthetically designed oyster with a slim body profile for both indoor and outdoor applications.







Unit: cd - C0/180 114.5deg - C90/270 114.1deg

KEY INFORMATION

Lumen Output	2040 / 2190 / 2080lm
Input Power	25W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Fitting Colour	WHITE
Warranty	5yr
IP Rating	IP54
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	81 / 87 / 83lm/W
LED	SMD
ССТ	3000 / 4000 / 5700K
CRI	>80
Beam Angle	115°

ELECTRICAL


Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	60V DC
Power Factor	>0.9
LED Input Current (nominal)	400mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	PMMA (acrylic)
Adjustable Angle	N/A
Fixings/Hardware	Mounting Bracket
Connection Type	Terminal Block
Total Weight	1kg
Dimensions	Ø300 x 49mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2




Intellisensor




Detection range, hold time, standby time and daylight threshold can be preset.





Wall Mount



Standby Dim Level

7 8

10%

20%

30%


50%

ELECTRICAL

Load Wattage	40W
Standby Power	<0.5W
Microwave Frequency	5.8Ghz
Detection Area	<0.2mW
Detection Sensitivity	15mx16m (DxH)
Hold Time	50% / 100%
Standyby Time	0s to 30min +
Standby Dimming Level	10% to 50%
Daylight Threshold	50lux / Disable
Dimensions	125x51x44mm
IP Rating	IP54

Note: Permanent Standby overrides/disables Daylight sensor to save energy during daylight.

DIP SWITCH SETTINGS

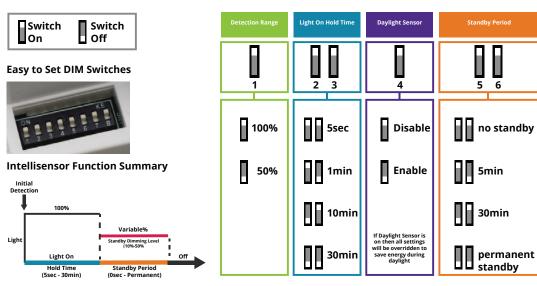



Specification subject to change without prior notice.