



DISCUS

Oysters


TRITONE
Colour
Changeable


IP54
Ingress
Protection
Rating


IK08
Impact
Rating


50,000hr
Expected
Lifetime


5yr
Warranty

Stylish and sleek.

DISCUS is a sleek, aesthetically pleasing oyster with a slim body profile and IP54 protection rating that makes this fitting the ideal choice in both indoor and outdoor applications. Intellisensor (MS) and emergency (EM) versions make sure all bases are covered.

Features

- Tritone selectable
- IP54 protection
- Polycarbonate body and acrylic diffuser
- Robust vandal resistant construction
- Emergency and sensor versions available

Benefits

- Reduced SKUs and inventory levels
- Perfect for damp area or outdoor installation
- Durable material selection
- Suitable for public areas
- Added security and safety

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
12W	1190 lm	99 lm/W	3000K	Ø250 x 40mm	0.65kg	2001934	DISC12W250R
	1260 lm	105 lm/W	4000K				
	1210 lm	101 lm/W	5700K				
25W	2040 lm	81 lm/W	3000K	Ø300 x 38mm	0.75kg 1.00kg	2001935 2001937	DISC25W300R DISC25W300R-MS
	2190 lm	87 lm/W	4000K				
	2080 lm	83 lm/W	5700K				
25W	2040 lm	81 lm/W	3000K	Ø300 x 38mm	1.20kg	2001936 2001938	DISC25W300R-EM DISC25W-EM-MS
	2190 lm	87 lm/W	4000K				
	2080 lm	83 lm/W	5700K				
30W	2800 lm	93 lm/W	3000K	Ø400 x 45.5mm	0.95kg	2001939	DISC30W400R
	3040 lm	101 lm/W	4000K				
	2910 lm	97 lm/W	5700K				


SPECIFICATIONS

Body Material:	Polycarbonate	Driver:	Integral
Diffuser Material:	PMMA (Acrylic)	Power Connection:	Terminal Block
Body colour:	White	Input:	220-240V, 50/60Hz
IP Rating:	IP54	Electrical Classification:	Class 2
IK Rating:	IK08	Power Factor:	>0.9
Beam Angle:	115°	Protection:	Overload / Short Circuit
CRI:	>80	Lifespan:	>50,000hrs @Ta25°C (L70)
SDCM:	<5	Operating Ambient Temperature:	0 to 45°C
		Dimming:	Phase-Cut Dimmable

APPLICATIONS

Retail
Commercial
Residential
Schools
Offices
Exterior Walls
Under Eaves
Stairwell

DIMENSIONS

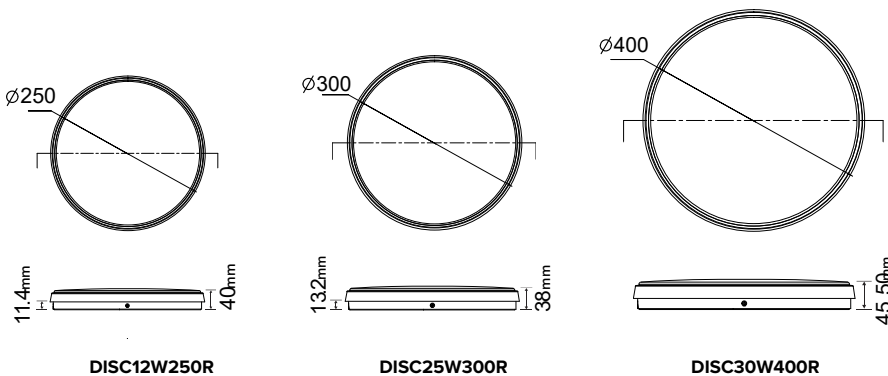

FIND OUT MORE:

