


DAWN 16W

DN16WOVL-TRI

SAP CODE: 2001706

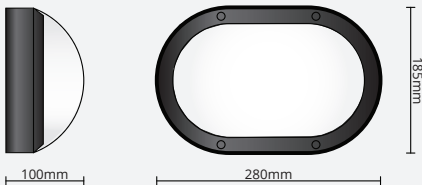


16W, IP66, Selectable Colour Temperature LED Bunker

A robust oval Bunker light, constructed with aluminium body and opal diffuser for both residential and commercial applications.



Photometric Diagram

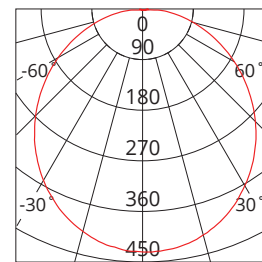

KEY INFORMATION

Lumen Output	1320 / 1500 / 1400lm
Input Power	16W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-dimmable (*phase-cut dimmable driver available)
Fitting Colour	BLACK
Warranty	3yr
IP Rating	IP66
IK Rating	IK10
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	83 / 94 / 87lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40V DC
Power Factor	>0.9
LED Input Current (nominal)	400mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	0.95kg
Dimensions	280 x 185 x 100mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.