


DAWN 20W

DN20WRND-TRI-EM

SAP CODE: 2001911

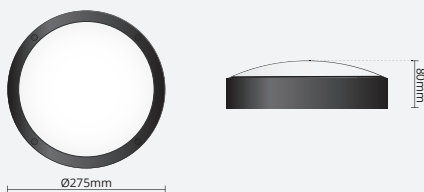

20W, Weather and impact resistant, Selectable colour temperature, LED Bunker with Emergency


A round robust bunker light constructed with aluminium body and opal diffuser providing decorative solution for both residential and commercial applications.

Accessories

EYELID TRIM



Photometric Diagram

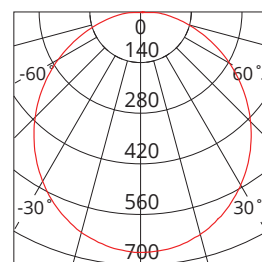

Unit: cd
 - C0/180 120.0deg
 - C90/270 120.0deg

KEY INFORMATION

Lumen Output	2050 / 2050 / 1890lm
Input Power	20W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-dimmable (*phase-cut dimmable driver available)
Fitting Colour	BLACK
Warranty	3yr
IP Rating	IP66
IK Rating	IK10
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	103 / 103 / 94lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40VDC
Power Factor	>0.9
LED Input Current (nominal)	500mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	1.6kg
Dimensions	Ø275 x 80mm
Operating Ambient Temp.	0 to 45°C
Electrical Classification	Class 1

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.