



DULAR EVO

DULAR-EV
SAP CODE: 2002622



Integrated, low-glare downlight

DULAR EVO is an integrated, Green Star compliant downlight designed for fast and efficient installation. It offers a clean, all-in-one body that simplifies ceiling integration — ideal for apartments, renovations, and commercial fit-outs.


APPLICATIONS

Bedrooms, Bathrooms, Dining Area, Hotel Rooms, Indoor Recreation, Laundry, Accent / Display / Feature Lighting, Butler Pantry

DIMENSION DIAGRAMS

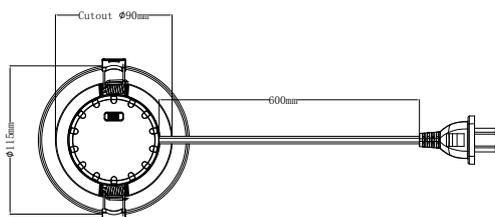

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180,56.0
— C90/270,56.1

Photometric diagram shown is for 3000K output.

KEY INFORMATION

Power	7 W
Lumen Output	866 / 800 lm
Cutout Size	Ø 90 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP54 F - IP20 B
IC Rating	IC-4
Operating Ambient Temp.	-20 to 40°C
Connection Type	0.6m Flex & Plug
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	121 / 113 lm/W
CCT	3000 / 4000 K
CRI	> 90
SDCM	< 3
UGR	< 19
Beam Angle	60°
Flicker-Free	Yes
Projected Lifespan	50,000hrs @ Ta25°C(L80B50)

ELECTRICAL

Input Voltage	220-240Vac 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	Not Applicable
Body Material	Plastic
Diffuser Material	Polycarbonate Lens
Rebate Scheme Approvals	Not Applicable
Weight	0.2 kg
Dimensions	Ø115 x 55 mm