



DURA FOREMAN

DURA-12-FRMN

SAP CODE: 2002543


Temporary weatherproof solution.

Illuminate your construction site with the DURA FOREMAN, an energy-efficient weatherproof batten designed for temporary applications. Perfect for commercial, residential, and infrastructure projects, the DURA FOREMAN offers a safe and flexible lighting solution.


APPLICATIONS

Temporary Installations

DIMENSION DIAGRAMS

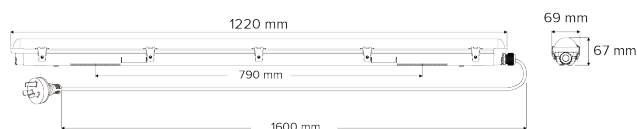

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180, 142.8

— C90/270, 107.7

Photometric diagram shown is for 4000 K output.

KEY INFORMATION

| | |
|-------------------------|---------------------------------|
| Power | 36 W |
| Lumen Output | 4094 lm |
| Mounting Type | Surface Mount / Suspended |
| Dimming Type | Non-Dimmable |
| Fascia Colour | Grey |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Operating Ambient Temp. | -15 to 40°C |
| Connection Type | PA9 Terminals, 1.7m Flex & Plug |
| Driver | Integral |
| Warranty | 1 yr |

PHOTOMETRIC

| | |
|--------------------|----------------------------|
| Efficacy | 115 lm/W |
| CCT | 4000 K |
| CRI | > 80 |
| SDCM | < 5 |
| UGR | Not Applicable |
| Beam Angle | 120° |
| Flicker-Free | Yes |
| Projected Lifespan | >50,000hrs @ Ta 25°C (L70) |

ELECTRICAL

| | |
|---------------------------|--------------------------|
| Input Voltage | 220-240Vac, 50/60Hz |
| Power Factor | > 0.9 |
| Electrical Classification | Class I |
| Surge Protection | Overload / Short Circuit |

OTHERS

| | |
|-------------------------|----------------------|
| Body Material | Polycarbonate |
| Diffuser Material | Polycarbonate (Opal) |
| Cable Entry | Both Ends |
| Rebate Scheme Approvals | |
| HACCP Approval | No |
| Weight | 1.11 kg |
| Dimensions | 1220 x 69 x 67 mm |