

ESODO^{EDGE} 40M SURFACE MOUNT

Thanks for choosing our **ESDOSO^{EDGE} 40M Emergency Exit Sign**.
We strongly recommend that you read this manual carefully before installation.



⚠ WARNING

- The luminaire must be installed by a licensed/qualified electrician in accordance with local wiring and relevant Australian standards.
- Ensure to disconnect mains supply before conducting any installation and maintenance on the luminaire.
- Ensure input voltage conforms to the voltage range of product.
- Ensure all the wiring is correct and secured before connecting mains supply to the luminaire.
- Warranty is void if product is not installed according to the instructions.



Product Specifications

PRODUCT CODE	MAX POWER CONSUMPTION (WHEN CHARGING)	IP RATING	INPUT RATING	OPERATING TEMPERATURE	ELECTRICAL CLASSIFICATION	EM TIME
ESD40M-SM	3.7W	IP20	220 – 240Va.c. 50/60Hz	0-40°	Class I	>1.5hr

Product Dimension

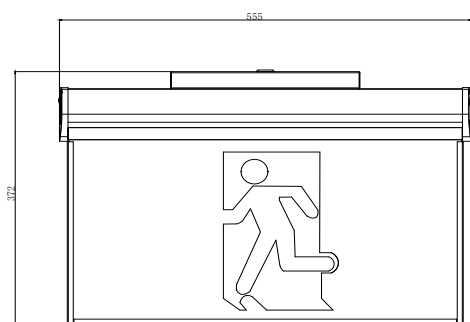


ESODO Edge 40M Emergency Exit sign can be wall and ceiling mounted.

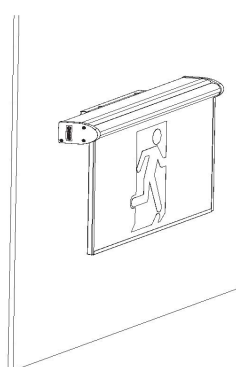

Installation Instructions

1 Switch-off mains power.

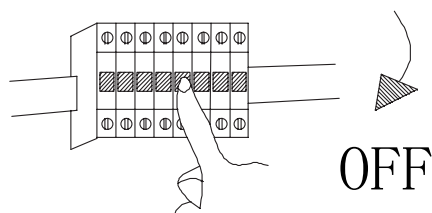

2 Choose the decal suitable for its application. Reference "Replacing the decal" section for instructions.



Straight




Right




Left

ESODO^{EDGE} 40M SURFACE MOUNT


- 3** Remove the top mounting cover. Undo the safety steel sling and luminaire connector from the top mounting cover.




- 4** Insert the mains supply cable through the top mounting cover. Secure the top mounting cover on the desired ceiling or wall location.




- 5** Wire the luminaire to the mains.




- 6** Connect the luminaire with the connector and secure the luminaire safety steel sling to the top mounting cover.

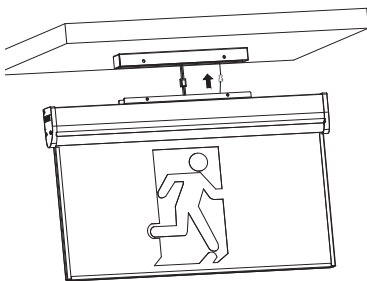

- 7** Secure the luminaire to the top mounting cover with the supplied screws.

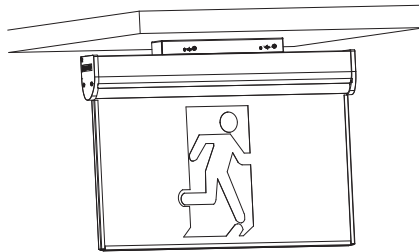


- 8** Test the installation in accordance with wiring rules and regulations. Switch ON the main power.

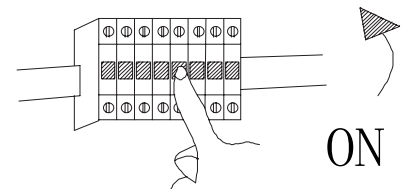


Replacing the decal


- 1** Remove the side and bottom trim by pulling it outwards. Peel the decal off from the fitting.

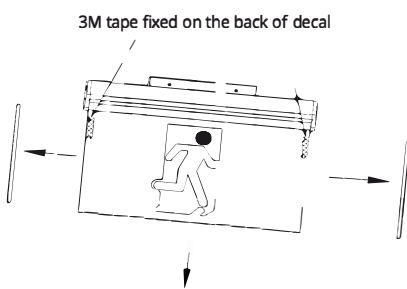

- 2** Remove and replace the desired decal.

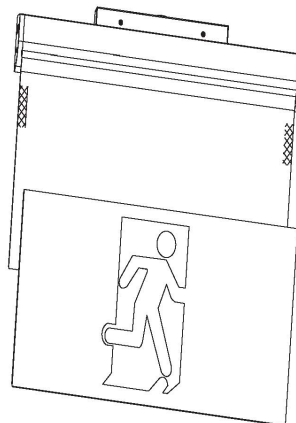

- 3** Install the side and bottom trims.

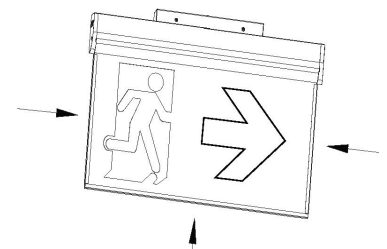

Information and data listed in this installation guide is subject to change. Visit our website for up-to-date information.