

# FLEXION DOTLESS

FXDL14W-6K2M

SAP CODE: 2002482


## Seamless lighting solution.

For ambient or feature lighting, the new Flexion Dotless range offers integrated lighting solutions that produce bright, effective linear illumination. Endless flexibility is provided by the Flexion Dotless series when combined with the complementing Parallax profile range.

### APPLICATIONS

Accent / Display / Feature Lighting, Boardroom / Meeting Rooms, Butler Pantry, Cabinetry, Cocktail Lounge, Ensuite, Games Rooms, Hallways, Hotel Rooms, Restaurants / Cafes, Retail Spaces, Showrooms, Staircase, Walk-in Wardrobes, Kitchen / Food Prep, Function Areas

### DIMENSION DIAGRAMS

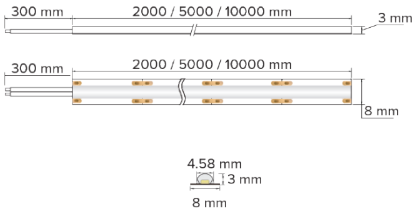

### KEY INFORMATION

|                         |   |
|-------------------------|---|
| Power                   | 14W/m                                     |
| Lumen Output            | 1470 lm per metre                         |
| Cut Length              | 55 mm                                     |
| Mounting Type           | Self Adhesive Backing                     |
| Dimming Type            | Non-Dimmable                              |
| Fitting Colour          | White                                     |
| IP Rating               | IP40                                      |
| Operating Ambient Temp. | 0 to 40°C                                 |
| Connection Type         | 450mm flying tail with 1.2m flex and plug |
| Driver                  | Remote                                    |
| Warranty                | 5 yrs                                     |

### PHOTOMETRIC

|                    |                          |
|--------------------|--------------------------|
| LED                | SOB                      |
| Efficacy           | 110 lm/W                 |
| CCT                | 6000 K                   |
| CRI                | > 90                     |
| SDCM               | < 3                      |
| Beam Angle         | 140°                     |
| Flicker-Free       | No                       |
| Projected Lifespan | 54,000hrs @ Ta 25° (L70) |

### ELECTRICAL

|                           |                          |
|---------------------------|--------------------------|
| Input Voltage             | 220-240Vac 50/60HZ       |
| Driver Output Voltage     | Not Applicable           |
| Power Factor              | > 0.9                    |
| Electrical Classification | Class II                 |
| Surge Protection          | Overload / Short Circuit |

### OTHERS

|            |                  |
|------------|------------------|
| Weight     | 0.3 kg           |
| Dimensions | 2,000 x 8 x 3 mm |

#### Disclaimer

Compatible with all Parallax