

HALO

Modern Presence. Powerful Output.



>80
CRI Colour
Rendering
Index



IP66
Ingress
Protection
Rating



IK08
Impact
Rating



Flicker
Free



APPLICATIONS:


Residential: Garden pathways, outdoor recreation areas
Public & Commercial: Area lighting, carpark, road lighting




HALO brings contemporary architectural styling together with high lumen performance up to 12,000 lumens. DALI dimmable and rated IP66 & IK08, it's engineered for urban streetscapes and public areas requiring performance, control, and reliability in up to 50°C conditions.

IP RATING IP66	CRI > 80	BEAM ANGLE Type III	FLICKER-FREE YES	OPERATING TEMP. -30 to 50 °C
PRODUCT COLOUR Black RAL9017	PROJECTED LIFESPAN >80,000hrs @ Ta 25°C (L80)	WARANTY 5 Years		

Modern Presence.
Powerful Output.

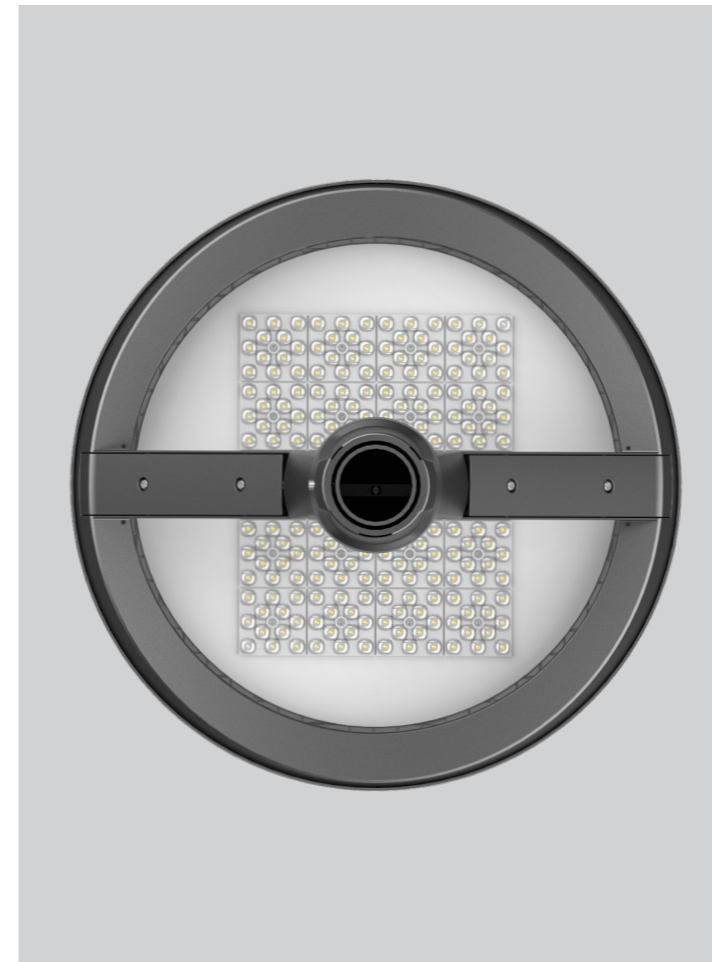

PHOTOMETRIC DIAGRAM

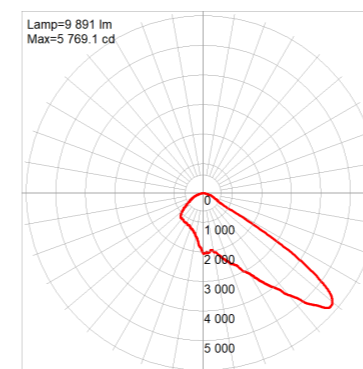

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.90
Electrical Classification	Class I
Surge Protection	10kV

KEY INFORMATION

Product Code	Power	Lumen	CCT	IK Rating	Dimming	Driver
HALO40W830T3	40W	4800 lm				
HALO75W830T3	75W	7200 lm	3000K	IK08	DALI Dimmable	In Built
HALO100W830T3	100W	9000 lm				

DIMENSIONS & WEIGHTS

Product Code	A x B (mm)	Weight (kg)
HALO40W830T3	Ø 450x526mm	7.58
HALO75W830T3	Ø 450x526mm	7.94
HALO100W830T3	Ø 450x526mm	7.97

