




## Constant Current LED Driver

### Product Features:

- Super slim design
- Driver for built-in use
- Push wire connections
- For use in luminaires of protection class I
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Suitable for use in emergency lighting systems
- SELV equivalent

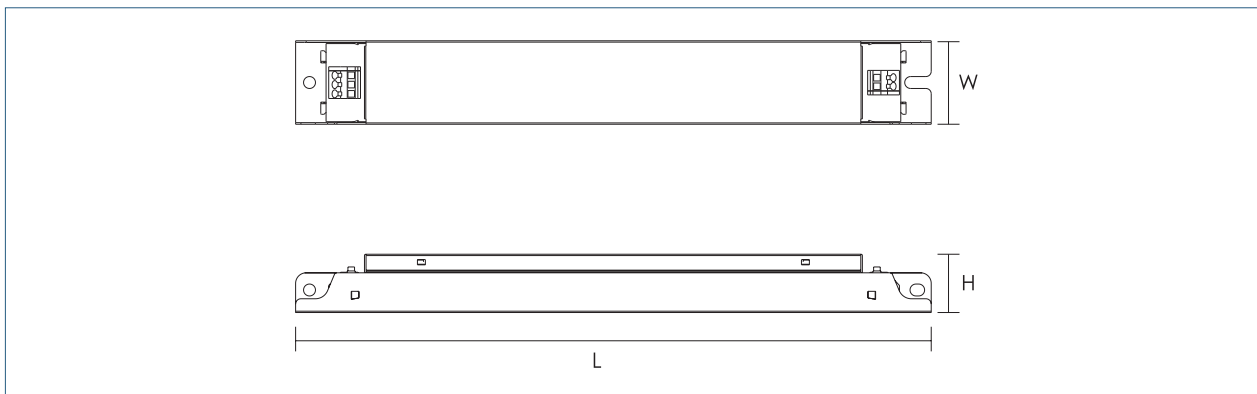

Model No.	Input Voltage	Max. Output	Output Voltage	Output Current	Power Factor	Ambient Temperature	Casing Temperature	Dimensions LxWxH(mm)	Weight
HN-4060W-1050	220-240V	60W	20-57V	1050mA	0.95	-20...+50	85°	280*38*28	300g