




IKON

Residential Downlight

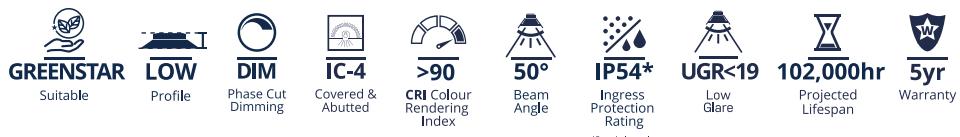

Greenstar compliant meets architectural quality.

IKON is a compact, recessed downlight designed for performance and compliance. With UGR<19, CRI>90, SDCM<3, and a 40mm profile with remote driver, it delivers consistent, comfortable lighting for Greenstar projects and shallow ceiling spaces.

Features

- Glare-free illumination with UGR < 19
- High Colour Rendering Index (CRI)
- Dual colour changeable
- IC-4 rating (ta 25°C)
- IP54 rating (from below)
- Low profile design
- Dimmable driver
- Modernised design

Benefits

- Excellent lighting option for indoor work places;
- True colour definition to highlight natural colour;
- Provides the choice of light hues from a single luminaire;
- Allows for covered and abutted installations;
- Suitable for wet rooms such as bathrooms & laundries
- Suitable for very shallow ceiling spaces;
- Adjustable brightness to improve comfort;
- Provides high end appearance;

Product Overview

PRODUCT CODE	POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	COLOUR
IKON8W	8 W	772 / 808 lm	107 / 112 lm/W	3000 / 4000 K	0.2 kg	2002623	White
IKON8W-BK	8 W	772 / 808 lm	107 / 112 lm/W	3000 / 4000 K	0.2 kg	2002672	Black

SPECIFICATIONS

Body Material:	Plastic coated Aluminium
Diffuser Material:	Polycarbonate Lens
Body colour:	White
Fascia colour:	White RAL 9016
IP Rating:	IP54 Front
Beam Angle:	50°
CRI:	> 90
SDCM:	< 3
IC Rating:	IC-4
UGR:	<19

Driver:	Remote
Connection	0.6m Flex & Plug
Type:	
Input:	220-240V a.c. 50/60Hz
Electrical	
Classification:	Class II
Power Factor:	> 0.9
Protection:	Overload / Short Circuit
Lifespan:	>102,000hrs@Ta25°C(L70)
Operating	
Ambient	-20 to 45°C
Temperature:	
Smart:	KASTA Compatible
Dimming:	Phase-Cut Dimmable DALI Dimmable Models Available.

APPLICATIONS

- Bedrooms
- Lounge Room
- Dining Area
- Laundry
- Butler Pantry
- Hallways
- Entrance
- Staircase
- Bathrooms
- Ensuite
- Theatre Rooms
- Games Rooms
- Hotel Rooms

DIMENSIONS (mm)

