

# Dry Contact Output Module

KASTA-S10IBH



Smart dry contact output module for the connection to and control of third-party equipment, and connects to a momentary push button mechanism.


## FEATURES

- Supports Pulse and Toggle control modes with ON/AUTO OFF and ON/OFF options
- Suitable for interconnection with Class I, Class II or Class III equipment
- 5-wire connection for power, load and switch mechanism (momentary or toggle)
- 4 output modes - 1s, 6s and 9s pulse ON (auto OFF) and toggle ON/OFF - default setting is 1s pulse
- Control third-party equipment such as garage doors, motorised gates, irrigation systems etc.
- Reliable Bluetooth® mesh network connectivity to all KASTA devices
- 8-way multiway control
- Short press (or toggle) on input S1 or S2 to activate ON state
- Built-in over-voltage protection, with maximum 30 second run time
- Supports core KASTA functionality - control devices, groups, scenes, timers and scheduling
- Suits all Australian standard wall plates using a momentary or toggle mechanism
- iOS and Android app setup and control
- 3 year warranty

## SPECIFICATIONS

Power Supply	220-240V a.c. 50Hz
Operating Ambient Temperature	-20 to 50°C
IP Rating	IP20
Physical Connection Type	Terminals
Wiring Connections	Active, Neutral, Load & Switch Mechanisms
Load Output Max.	2400W (10A)
Load Compatibility	0 to 240V a.c. 0 to 30V d.c.
Housing Material	Polycarbonate (PC)
Standards Complied	AS/NZS 60669.2.1, AS/NZS 60669.1, AS/NZS 60950.1, AS/NZS CISPR 15, AS/NZS 4268

## DIMENSIONS

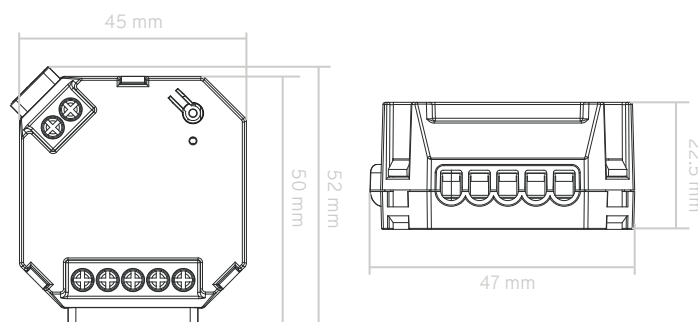

## CONNECTION

