




LUME REMOTE

Emergency Luminaires

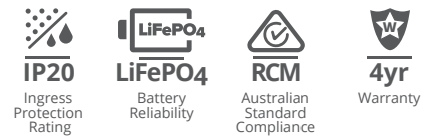

A subtle and reliable safety solution.

LUME REMOTE is a sleek, emergency luminaire suitable for an extended variety of applications. The foldable flex driver enables installation in locations with limited ceiling space. Using reliable lithium iron phosphate (LiFePO4) battery technology, this state-of-the-art product ensures low maintenance and energy efficiency. Compliant to AS/NZS 2293.3, offering D40/D63 emergency classification.

Features

- D40 or D63 emergency classification
- Simple test button
- IC-4 Rating allows covering with building insulation
- LiFePO4 battery compliant with AS2293.3
- More than 2 hours discharge time
- Available in black or white finish

Benefits

- Optimised product spacings
- Easy maintenance
- Simple and quick installation
- Peace of mind for end user
- Enables installation in tight spaces
- Suitable for a wide range of applications

Product Overview

POWER (Standby)	POWER (Charging)	DISCHARGE TIME	RECHARGE TIME	LUMENS	CCT	EMERGENCY CLASSIFICATION	CUTOUT	SAP CODE	PRODUCT CODE
1W	2.5W	3 hours	16 hours	100lm	5700K	D40	Ø43/90/110mm	2002088 2002177	LUME1WD40-REMOT LUME1W-D40-RE-BK
2.5W	4.5W	3 hours	16 hours	300lm	5700K	D63	Ø43/90/110mm	2002089 2002178	LUME3WD63-REMOT LUME3W-D63-RE-BK

BK = Black

SPECIFICATIONS

Type:	Non-Maintained	Driver:	Remote
Body Material:	Polycarbonate	Power Lead:	1.5m Flex & Plug
Diffuser Material:	Polycarbonate (Clear)	Input:	220-240V, 50/60Hz
Fascia Colour:	White Black	Electrical Classification:	Class 2
IP Rating:	IP20	Battery Type:	D40: LiFePO4 3.2V 1.5Ah D63: LiFePO4 3.2V 3.6Ah
IC Rating:	IC-4 (ta 25°C)	Charger Operation:	Continuous
AS/NZS Standards:	60598 / 2293.3	Battery Test Button:	Manual
Beam Angle:	150°	Lifespan:	>50,000hrs @Ta25°C (L70)
CRI:	>80	Weight:	0.3kg
		Operating Ambient Temperature:	0 to 40°C

APPLICATIONS


Office Buildings
Shopping Centres
Car Parks
Sporting Venues
Schools
Hospitals
Hotels
Bars and Restaurants
Industrial Facilities
Warehouses
Foyers and Hallways
Multi-Residential

ACCESSORIES

Ø110mm Adaptor
(Ø90mm Cut Out)
(included)




Ø140mm Adaptor
(Ø110mm Cut Out)
(included)

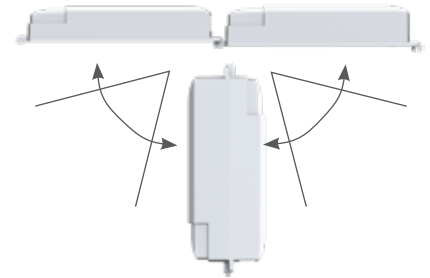


Smart foldable driver

Exit and Emergency

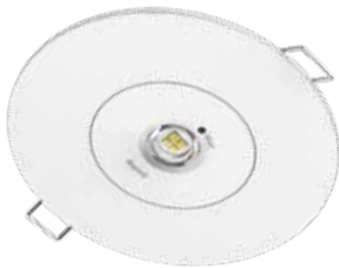


White

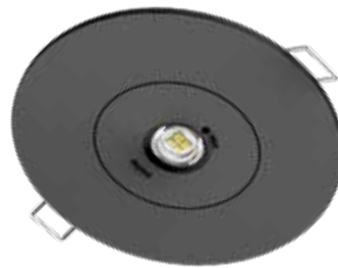

Black

DIMENSIONS

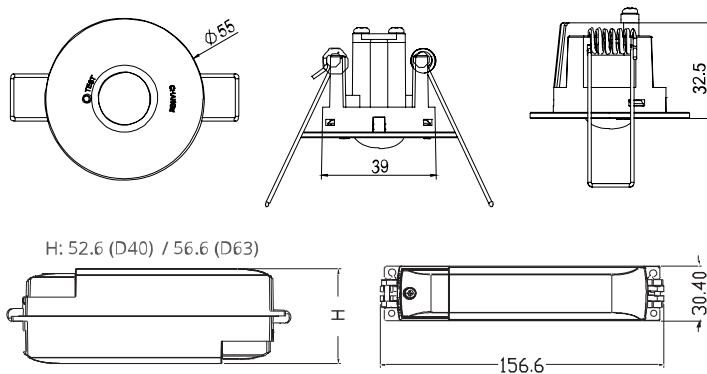

FIND OUT MORE:

