


LUME3WD63-SM


LUME3WD63-SM
 SAP CODE: 2001869

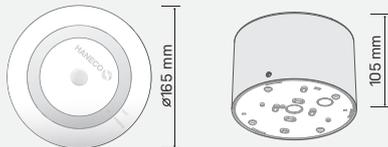

Non-maintained surface mount LED emergency light

Surface mount Emergency LED light with LiFePO4 battery that delivers 2 hours of light during power failures.

LUME3WD63-SM-BK
 SAP CODE: 2001869



AVERAGE BEAM ANGLE (50%): 156.6 DEG

— C0/180 156.4deg
 — C90/270 156.6deg

QUICK FACTS

- Lithium iron phosphate battery (LiFePO4) compliant with AS2293
- More than 2 hours of emergency light
- Simple test button
- D63 Emergency classification
- Large terminals for easy wiring
- 5 year warranty (4 year battery)

SPECIFICATIONS

| | |
|--------------------------|------------------------------|
| Power | 0.5W (Standby) 4W (Max) |
| IC | IC-4 |
| Battery | LiFePO4 3.2V 3.3Ah |
| Charge Time | 16 Hours |
| Discharge Duration | > 2 Hours |
| Emergency Classification | C0:D63, C90:D63 |
| IP Rating | IP40 |
| Test Facility | Manual Test |
| Operation | Non-Maintained |
| Lumen Output | 340lm |
| CCT | 5700K |
| CRI | >80 |
| Beam Angle | 150° |
| Fascia Colour | White (Black Also Available) |
| Installation | Surface Mount |
| Warranty | 5 Years (Battery 4 Years) |
| Supply Voltage | 220-240V a. c. |
| Supply Frequency | 50-60Hz |
| Cable | 1.5m Flex & Plug |
| Body | Polycarbonate |
| Diffuser | Polycarbonate (Clear) |
| Driver | Integral |
| Weight | 0.3Kg |
| Ambient Temperature | 0° - 40° |