


# METEOR

**M13W90R-BK-TRI**

SAP CODE: 2002199

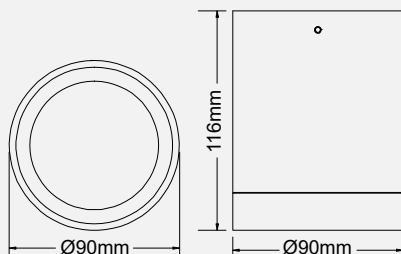


## Sleek, low glare design.

The METEOR is a surface mounted tubular downlight with a recessed clear lens and multifaceted specular reflector, which provides optimum glare control. It is ideal for architectural indoor and outdoor applications.



## PHOTOMETRIC DIAGRAM


 Unit: cd  
 - C0/180 47.2deg  
 - C90/270 52.8deg

## KEY INFORMATION

Watts	13W
Input Power	13W
Lumen Output	900lm / 1100lm / 1050lm
Install	Surface Mount
Dimming Options	Phase-Cut Dimming
Fitting Colour	Matte Black RAL 9005
Warranty	5 Years
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approval	-

## PHOTOMETRIC

Efficacy	65lm/W / 85lm/W / 80lm/W
LED	Dual color COB
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	45°

## ELECTRICAL

Driver	Integral
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	40V
Power Factor	>0.9
LED Input Current (nominal)	300mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

SDCM	<5
Housing	Aluminium
Optics	Multifaceted specular reflector
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Push button terminals
Total Weight	860g
Dimensions	Ø90x116mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2